

Product data sheet

Specifications

SQUARE D



Load center, QO, 1 phase, 24 spaces, 34 circuits, 100A convertible main breaker, PoN, NEMA1, combo cover, value pack

QO124M100PCVP

Product availability: Stock - Normally stocked in distribution facility

Main

Marketing Trade Name	QO
Product Type	Load Center
Cover Type	Combination flush/surface cover
Installation Orientation	Vertical
Provided Equipment	Load center 1) 24P 125 A 120/240 V AC Circuit-breaker 3) 1P 20 A 120 V AC downstream Circuit-breaker 2) 2P 30 A 120/240 V AC downstream

Complementary

Tightening Torque	Cover 20 lb.in
PoN Convertible Mains (lugs)	PoN Convertible Mains (breaker)
Rated Current	100 A
Number of Spaces	24
Max Short Circuit Current Rating	22 kA
Maximum Number of Single Pole Circuits	24
Maximum Number of Tandem Breakers	0
Number of Phases	1 phase 3 wires
Voltage Rating	120/240 V AC
Wire Size	AWG 6...AWG 2/0 aluminium/copper
Ground Bar	Grounding bar (ordered separately)
Electrical Connection	Lugs
Busbar Material	Tin plated copper; busbar
Enclosure Material	Welded sheet steel
Surface Finish	Baked enamel Gray
Box Number	7
Height	20.9 in (531 mm)
Width	14.3 in (362 mm)
Product Weight	23.100 lb(US) (10.478 kg)

Environment

Enclosure Rating	NEMA 1 indoor enclosure
------------------	-------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL Listed

Ordering and shipping details

Category	US1DE3A00184
Discount Schedule	DE3A
GTIN	785901978930
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.600 in (14.224 cm)
Package 1 Width	16.000 in (40.640 cm)
Package 1 Length	23.600 in (59.944 cm)
Package weight(Lbs)	23.100 lb(US) (10.478 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	35
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	42.000 in (106.680 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	839.999 lb(US) (381.017 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	58 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	53 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	4 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0.1 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	1 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	89
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration


Dimensions

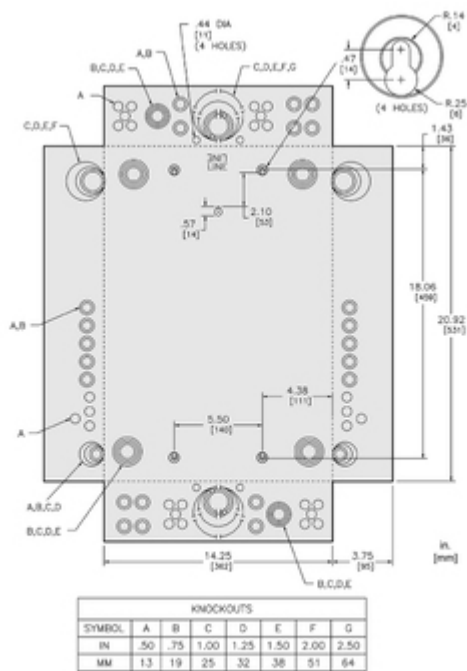

ALL DIMENSIONS ARE APPROXIMATE.
ALSO REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION.

Technical Illustration

Wiring diagram

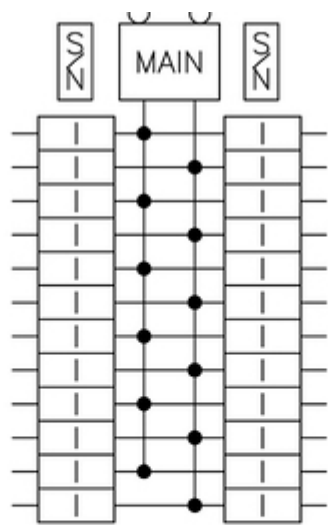

QO124M100
QO124M125

Image of product / Alternate images

Alternative



