

Product data sheet

Specifications



Mini circuit breaker, QO, 50A, 1 pole, 120/240VAC, 10kA, bolt on

QOB150

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Miniature circuit-breaker
Range	QO
Current Rating	50 A
Voltage Rating	120/240 V AC 120 V AC
Mounting Type	Bolt-on
Number of Poles	1P
Circuit Breaker Type	Standard
Ratings	HACR rated
Electrical Connection	Pressure plate

Complementary

Interrupt Rating	10 kA 120/240 V AC 10 kA 120 V AC
Number of Panel Spaces	1
Wire Size	AWG 8...AWG 2 copper or aluminium
Tightening Torque	44.3 lbf.in (5 N.m)
Height	3.1 in (79 mm)
Width	0.7 in (19 mm)
Depth	2.9 in (74 mm)
Product Weight	0.311 lb(US) (0.141 kg)

Environment

Certifications	UL Listed CSA
Ambient Rating	104 °F (40 °C)

Ordering and shipping details

Category	US10DE200015
Discount Schedule	0DE2
GTIN	785901416807
Returnability	Yes
Country of origin	MX

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	0.900 in (2.286 cm)
Package 1 Width	3.500 in (8.890 cm)
Package 1 Length	3.600 in (9.144 cm)
Package weight(Lbs)	4.960 oz (140.614 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	96
Package 2 Height	3.800 in (9.652 cm)
Package 2 Width	14.900 in (37.846 cm)
Package 2 Length	21.500 in (54.610 cm)
Package 2 Weight	30.111 lb(US) (13.658 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	2880
Package 3 Height	40.000 in (101.600 cm)
Package 3 Width	40.000 in (101.600 cm)
Package 3 Length	48.000 in (121.920 cm)
Package 3 Weight	893.0008 lb(US) (405.058 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	18 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.8 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	17 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
SCIP Number	Af42fb01-813d-40c0-ae28-b8b3299dbc99
EU RoHS Directive	Compliant
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel (Metallic), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free product

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	0
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

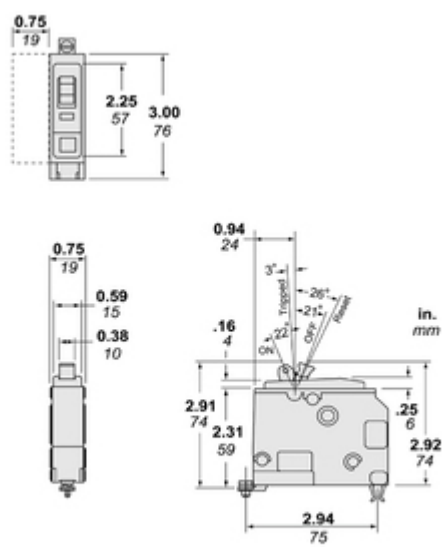

Dimensions are approximate. Refer to technical documentation for additional detail.

Image of product / Alternate images

Alternative



