


SYLVANIA Luminaires

Installation Guide – Exit Signs (Combo)

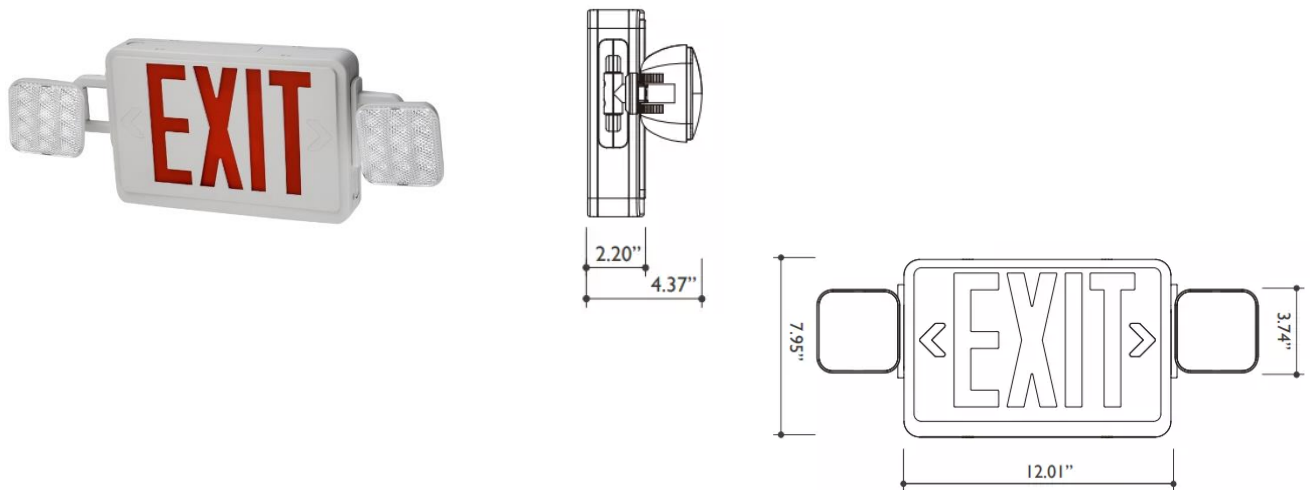

For warranty coverage, please register at www.sylvania.com/warrantyregistration.

⚠ WARNING

- The battery in this unit may not be fully charged. After electricity is connected to unit, let battery charge for at least 24 hours, then normal operation of this unit should take effect. To check, press TEST button. The emergency LED lamps should illuminate.
 - When re-lamping, use only LED lamps specified in the fixture. Using other lamp types may result in transformer damage or unsafe conditions.
1. Do not use outdoors.
 2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.
 3. Do not mount near gas or electric heaters
 4. Cap unused wires with enclosed wire nuts or other approved method.
 5. Do not use this equipment for anything other than its intended use.
 6. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition.
 7. Disconnect AC power before servicing and installation.
 8. Consult local building code for approved wiring and installation.
 9. Use caution when servicing batteries. Battery acid can cause burns to skin and eyes. If acid is spilled on skin or eyes, flush acid with fresh water and contact a physician immediately.
 10. Any service on this equipment should be performed by qualified personnel only.
 11. Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels.

Product Information

IMPORTANT: READ CAREFULLY BEFORE INSTALLING THE FIXTURE. RETAIN FOR FUTURE REFERENCE.

GENERAL: Upon receipt of the product, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier.

Wiring Diagrams



INSTALLATION:

Mounting Instruction (Ceiling Mount)

1. Remove faceplate and set aside.
 2. Connect 20-inch jumper leads to AC input leads in J-Box. Fasten J-Box bracket to J-Box. Use black wire for 120V. Use orange or red wire for 277V. White wire is common.
 3. Fasten canopy to J-Box bracket.
 4. Remove canopy hole cover on the top and snap housing to canopy.
- Connect and trim input leads and slide through the canopy and connect to supply leads in the J-Box.
6. Connect battery only after continuous AC power can be provided to the unit.
 7. Remove proper chevron(s) as required.
 8. Secure face plate(s) to housing

Mounting Instruction (Wall Mount)

1. Remove faceplate and backplate and set aside.
2. Connect 20-inch jumper leads to AC input leads in J-Box. Fasten J-Box bracket to J-Box. Use black wire for 120V. Use orange or red wire for 277V. White wire is common.
3. Remove necessary knockouts and fasten back plate to J-Box cover.
4. Snap housing on to back plate.
5. Connect and trim input leads and slide through the hole in the backplate and connect to supply leads in J-Box.
6. Connect battery only after continuous AC power can be provided to the unit.
7. Secure face plate(s) to housing.

Maintenance:

Regular annual inspection is highly advised for major signs of corrosion, critical failures, etc. Further, inspection is highly advised following heavy storms, hurricanes and other large weather events. The previous advisements are in conformity with industry standards.