
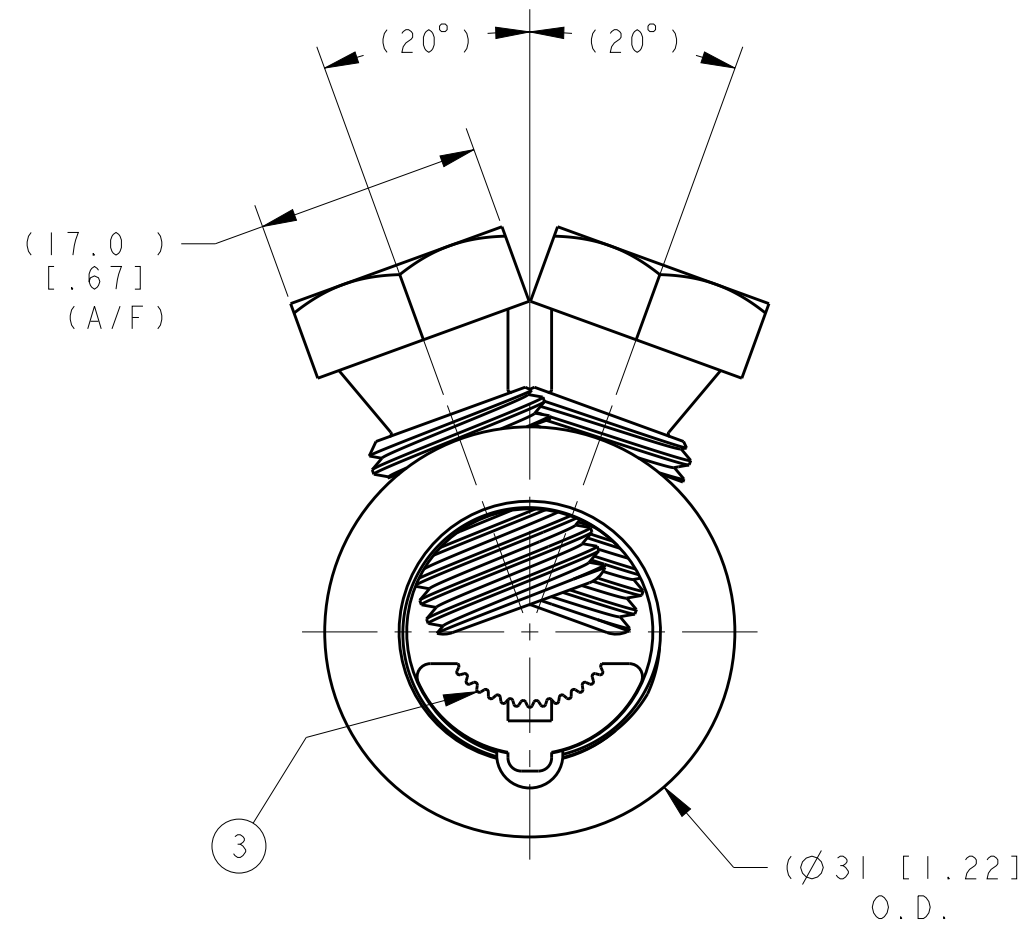
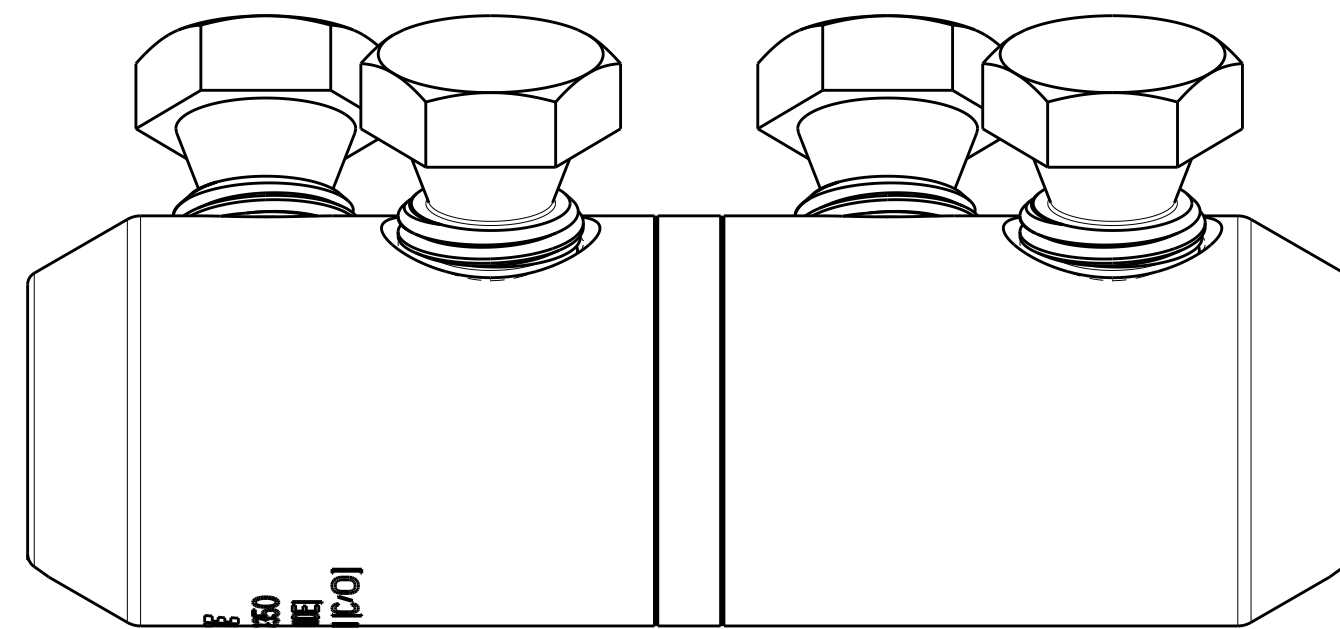


1. ACCOMMODATES:  
#2 AWG COMPACT (Ø6.81 [.268]) TO  
350 KCMIL STD STR (Ø17.30 [.68])  
ALUMINUM OR COPPER CONDUCTORS.
2. MARKING:  
  
ASBS-2-350  
[DATE CODE]  
MADE IN [COUNTRY OF ORIGIN]
3. INSERT SHALL BE REMOVED FOR CONDUCTOR  
SIZES GREATER THAN 4/0 STANDARD STRANDED  
(13.4 [.528] CONDUCTOR DIAMETER)
4. CONNECTOR CONTAINS FACTORY APPLIED  
ANTI-OXIDE INHIBITOR.
5. INSTALL BOLTS WITH "1/16 INCH" HEX SOCKET.

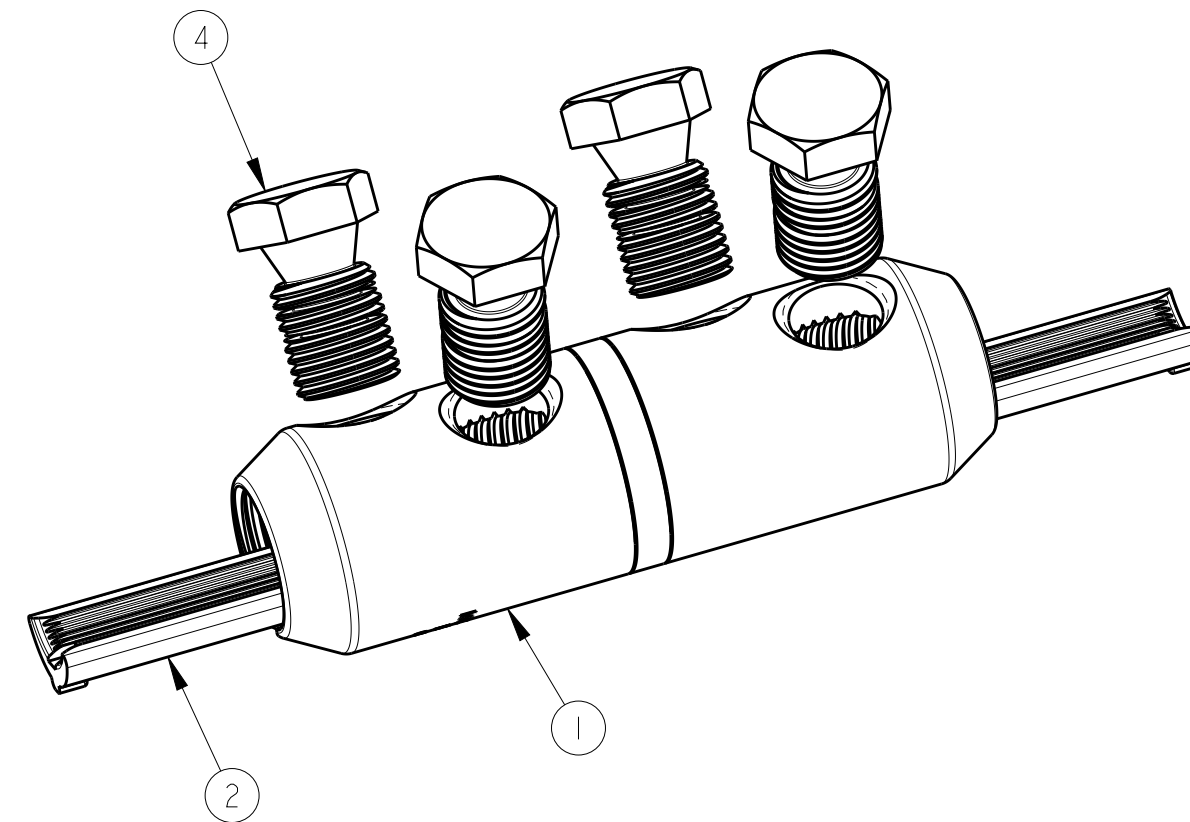

|            |           |
|------------|-----------|
| ASBS-2-350 | 1099739-1 |
| CATALOG NO | PART NO.  |

|     |                                                   |         |
|-----|---------------------------------------------------|---------|
| 1   | 6" X 8" POLY BAG                                  | 7       |
| 1   | INSTALLATION INSTRUCTION SHEET 408-8990           | 6       |
| 1   | ABRASIVE TAPE, 1X24-120 G                         | 5       |
| 4   | BOLT, MULTI-SHEAR, M14x1.5, ALUMINUM              | 4       |
| A/R | CONTACT GREASE                                    | 3       |
| 2   | INSERT, TIN PLATED, SHEARBOLT CONNECTOR, ALUMINUM | 2       |
| 1   | SHEARBOLT CONNECTOR BODY, TIN PLATED, ALUMINUM    | 1       |
| - 1 | DESCRIPTION                                       | ITEM NO |
| QTY | PARTS LIST                                        |         |

|                                                                                       |  |                                           |  |                                                                                                       |                              |
|---------------------------------------------------------------------------------------|--|-------------------------------------------|--|-------------------------------------------------------------------------------------------------------|------------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |  | DWN<br>D. ROBITAILLE<br>10SEP2004         |  |  TE Connectivity |                              |
|                                                                                       |  | CHK<br>A. BULZA<br>14JAN2005              |  |                                                                                                       |                              |
| DIMENSIONS:<br>mm [ INCHES ]                                                          |  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED: |  | NAME<br>SHEARBOLT CONNECTOR, ALUMINUM<br>#2AWG COMPACT STRANDED<br>TO 350 KCMIL STD STR CONDUCTORS    |                              |
|  |  | APVD<br>B. JOHNSON<br>17JAN2005           |  |                                                                                                       |                              |
|                                                                                       |  | PRODUCT SPEC                              |  |                                                                                                       |                              |
|                                                                                       |  | APPLICATION SPEC                          |  |                                                                                                       |                              |
| MATERIAL<br>SEE BOM                                                                   |  | FINISH<br>TIN PLATED                      |  | SIZE<br>A2                                                                                            | CAGE CODE<br>00779           |
|                                                                                       |  | WEIGHT                                    |  | DRAWING NO<br>C-1099739                                                                               | RESTRICTED TO<br>-           |
| CUSTOMER DRAWING                                                                      |  |                                           |  | SCALE                                                                                                 | NTS<br>SHEET 1 OF 1<br>REV H |

