




Energy & Power > Power Cable Accessories > Joints & Splices > Inline Splice: Cold Shrink, 15-35 kV

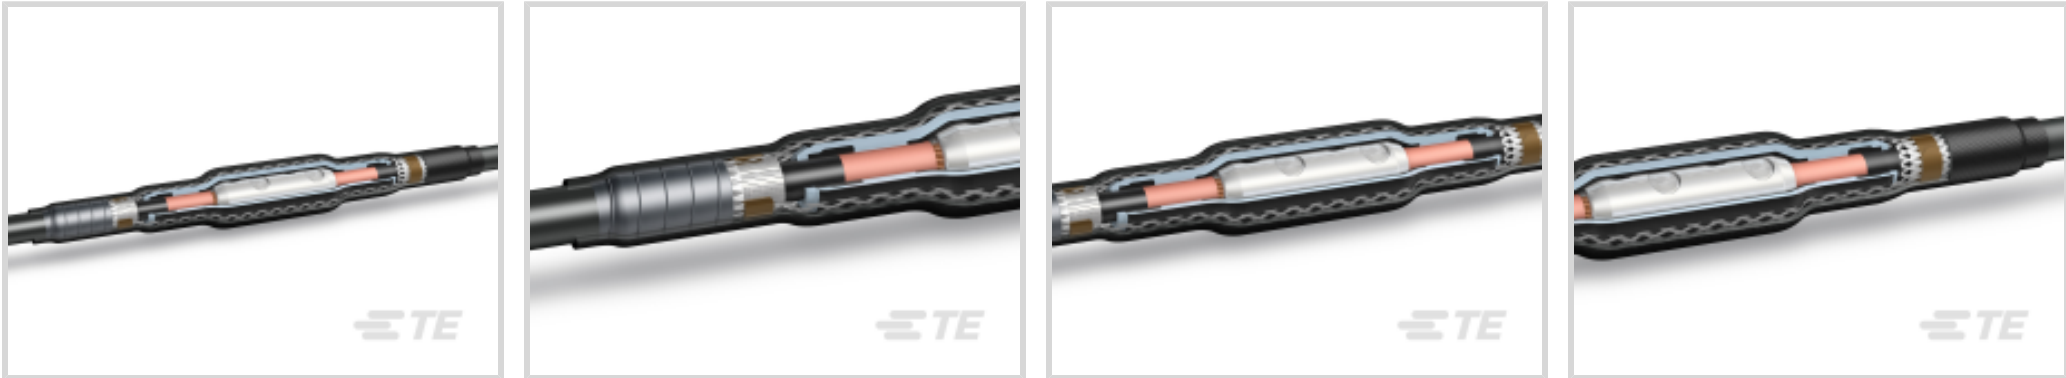

Installation Technology: **Cold Applied**
Product Availability: **Americas**
Installation Instruction: **English**
Joints & Splice Product Type: **Inline Joint**
Voltage Class: **≤ 15 kV**

[All Inline Splice: Cold Shrink, 15-35 kV \(38\)](#)

Features

Product Type Features

Coating Style	Painting
Material System	Silicone
Shelf Life	2 Years
Cable Sealing Method	Mastic
Joints & Splices Connector Type	Mechanical
Adhesive Coating	Without
Installation Technology	Cold Applied
Joints & Splice Product Type	Inline Joint
Cable Shield Style	Concentric Neutral, FS, Tape

Configuration Features

Number of Cores	1
-----------------	---

Electrical Characteristics

Voltage Class	≤ 15 kV
---------------	---------

Body Features

Primary Product Color	Black
Flexibility	Semi-Flexible



Insulation Material	Silicone Rubber
---------------------	-----------------

Dimensions

Length (Installed)	838 mm[33 in]
Compatible Conductor Range	350 – 1000 AWG/kcmil
Compatible Insulation Diameter Range	26.2 – 40 mm[1.03 – 1.58 in]
Compatible Conductor Diameter Range	17.29 – 29.26 mm[.681 – 1.152 in]
Sheath Outside Diameter	52.07 mm[2.05 in]

Industry Standards

Compatible With Approved Standards Products	IEEE 404
---	----------

Product Availability

Product Availability	Americas
----------------------	----------

Packaging Features

Packaging Quantity	1
Packaging Method	Cardbox

Other

Product Use	Power Cables
Installation Instruction	English

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Decamethylcyclopentasiloxane (D5) (80% in Component Part) Pb (1.5% in 74023549) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-ALROC-TOOLING
ALROC Cable Preparation Tooling



TE Part # CAT-CRSM
Wraparound Sleeve for Cable Repair



TE Part # CAT-BSM
Mechanical Connectors & Repair Sleeves

Also in the Series | RAYCHEM CSJ



Joints & Splices(135)

Customers Also Bought



TE Part #214081-000
HVES-3-1591



TE Part #CAT-CSJA-1C
Inline Splice: Cold Shrink, 15-35 kV



TE Part #E06317-000
HVT-Z-253/353-SG



TE Part #EN3750-272
TCC-28-28-U



TE Part #A36977-000
[GPRT-350-8P\(B6\)](#)

TE Part #2819718-6
[HVT-Z-151-SJ-3/0-MX](#)

TE Part #CS8231-000
[TFT-353R-SJ-LAM](#)

TE Part #2133638-9
[HVS-1523S-750-MX](#)

Documents

Product Drawings

[CSJA-1523](#)

English

Datasheets & Catalog Pages

[CSJA COLD SHRINK IN-LINE JOINTS IEEE](#)

English