

WAC LIGHTING

4" Low Voltage

New Construction Non-IC Housing

Model & Product

○ HR-8402E 4in Electronic Low Voltage New Construction Non-IC Housing

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Example: **HR-8402E**

DESCRIPTION


Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available with a variety of decorative adjustable and Wet Location trim options are available.

FEATURES


- Integral electronic transformer
- J-Box and transformer accessible through ceiling
- Advanced auto-reset, soft start and short circuit protection features
- Supplied thermal protector protects against over-lamping
- Transformer included
- 5 year warranty

SPECIFICATIONS

Construction	20 gauge galvanized steel
Power:	50W
Input:	120 VAC,50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Halogen
Mounting:	Supplied with hanger bars, adjustable from 15"-242" to accommodate various joist construction and grid sizes.
Cut Out:	4 9/16"
Ceiling Thickness:	3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Non IC

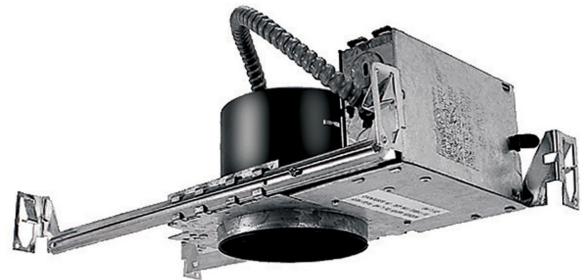

LINE DRAWING



WAC LIGHTING

4" Low Voltage

Adjustable Step Baffle Trim

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Light Source	Lumens	Finish
☐ HR-8411 LED MR16 (Order separately)		☐ WT/WT White/White
☐ HR-8411LED LED MR16 (Included)		

Example: **HR-8411-WT/WT**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES


- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 35° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	20 gauge steel
Input:	12 VAC
Light Source:	LED MR16 (Order separately), LED MR16 (Included)
Finish:	Electrostatically Powder Coated: White/White
Standards:	UL, cUL, Damp Location Listed



LINE DRAWING



WAC LIGHTING

4" Low Voltage

Die-Cast Adjustable Step Baffle Trim

Model & Light Source	Lumens	Finish
☐ HR-D411 LED MR16 (Order separately) ☐ HR-D411LED LED MR16 (Included)		☐ WT/WT White/White

Example: **HR-D411-WT/WT**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES

- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 35° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16 (Included), LED MR16 (Order separately)
Finish:	Electrostatically Powder Coated: White/White
Standards:	UL, cUL, Damp Location Listed

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____




FINISHES:



White/White

LINE DRAWING



WAC LIGHTING

4" Low Voltage

Die-Cast Adjustable Specular Square Trim

Model & Light Source	Lumens	Finish
☐ HR-D412-S LED MR16 (Order separately) ☐ HR-D412LED-S LED MR16 (Included)		☐ SC/BN Specular Clear/Brushed Nickel ☐ SC/WT Specular Clear/White

Example: **HR-D412-S-SC/BN**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES

- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 35° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16 (Included), LED MR16 (Order separately)
Finish:	Electrostatically Powder Coated: Specular Clear/White, Electroplated Specular Clear/Brushed Nickel
Standards:	UL, cUL, Damp Location Listed



FINISHES:




Specular
Clear/Brushed
Nickel



Specular
Clear/White

LINE DRAWING



WAC LIGHTING

4" Low Voltage

Die-Cast Adjustable Specular Round Trim

Model & Light Source	Lumens	Finish
☐ HR-D412 LED MR16 (Order separately) ☐ HR-D412LED LED MR16 (Included)		☐ SC/BN Specular Clear/Brushed Nickel ☐ SC/WT Specular Clear/White

Example: **HR-D412-SC/BN**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES

- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 35° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16 (Order separately), LED MR16 (Included)
Finish:	Electrostatically Powder Coated: Specular Clear/White, Electroplated Specular Clear/Brushed Nickel
Standards:	UL, cUL, Damp Location Listed

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____



FINISHES:




Specular
Clear/Brushed
Nickel



Specular
Clear/White

LINE DRAWING



WAC LIGHTING

4" Low Voltage

Die-Cast Adjustable Slotted Trim

Model & Light Source	Lumens	Finish
☐ HR-D413 LED MR16 (Order separately)		☐ WT White
☐ HR-D413LED LED MR16 (Included)		

Example: **HR-D413-WT**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES

- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 35° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16 (Order separately), LED MR16 (Included)
Finish:	Electrostatically Powder Coated: White
Standards:	UL, cUL, Damp Location Listed

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____




FINISHES:



White

LINE DRAWING



WAC LIGHTING

4" Low Voltage

Die-Cast Adjustable Square Trim

Model & Light Source	Lumens	Finish
☐ HR-D416 LED MR16 (Order separately) ☐ HR-D416LED LED MR16 (Included)		☐ BN Brushed Nickel ☐ WT White

Example: **HR-D416-BN**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES

- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 30° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16 (Order separately), LED MR16 (Included)
Finish:	Electrostatically Powder Coated: White, Electroplated Brushed Nickel
Standards:	UL, cUL, Damp Location Listed

Fixture Type: _____


Catalog Number: _____

Project: _____


Location: _____



FINISHES:



LINE DRAWING



WAC LIGHTING

4" Low Voltage

Die-Cast Gimbal Ring Trim

Model & Light Source	Lumens	Finish
☐ HR-D417 LED MR16 (Order separately)		☐ BN Brushed Nickel
☐ HR-D417LED LED MR16 (Included)		☐ WT White

Example: **HR-D417-BN**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES

- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 25° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16 (Included), LED MR16 (Order separately)
Finish:	Electrostatically Powder Coated: White, Electroplated Brushed Nickel
Standards:	UL, cUL, Damp Location Listed

Fixture Type: _____


Catalog Number: _____

Project: _____


Location: _____



FINISHES:



LINE DRAWING

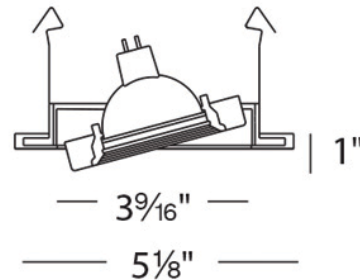

WAC LIGHTING

4" Low Voltage

Die Cast Shower Trim Clear Flat Glass

Model & Light Source	Lumens	Finish
☐ HR-D418-S LED MR16 (Order separately) ☐ HR-D418LED-S LED MR16 (Included)		☐ WT White

Example: **HR-D418-S-WT**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES

- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 35° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16 (Included), LED MR16 (Order separately)
Finish:	Electrostatically Powder Coated: White
Standards:	UL, cUL, Wet Location Listed

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____




FINISHES:



White

LINE DRAWING



WAC LIGHTING

4" Low Voltage

Die-Cast Adjustable Round Trim

Model & Light Source	Lumens	Finish
☐ HR-D425 LED MR16 (Order separately) ☐ HR-D425LED LED MR16 (Included)		☐ WT White

Example: **HR-D425-WT**

DESCRIPTION

Engineered for high-performance in a compact fixture, 4" Low Voltage Recessed Downlights are styled with form and function. Available for Non-IC installations, a variety of decorative adjustable and Wet Location trim options are available.

FEATURES

- Accommodates most LED MR16 lamps
- Center lamp holder allows lamp to be tilted up to 80° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Steel spring clips secure trim to housing
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum
Input:	12 VAC
Light Source:	LED MR16 (Included), LED MR16 (Order separately)
Finish:	Electrostatically Powder Coated: White
Standards:	UL, cUL, Damp Location Listed



FINISHES:



White

LINE DRAWING

