
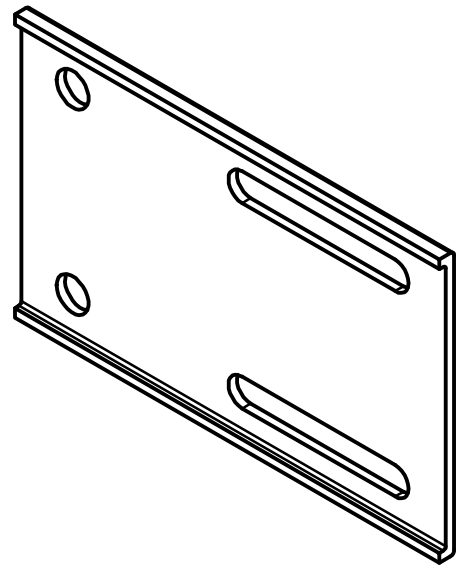


M-14460

1

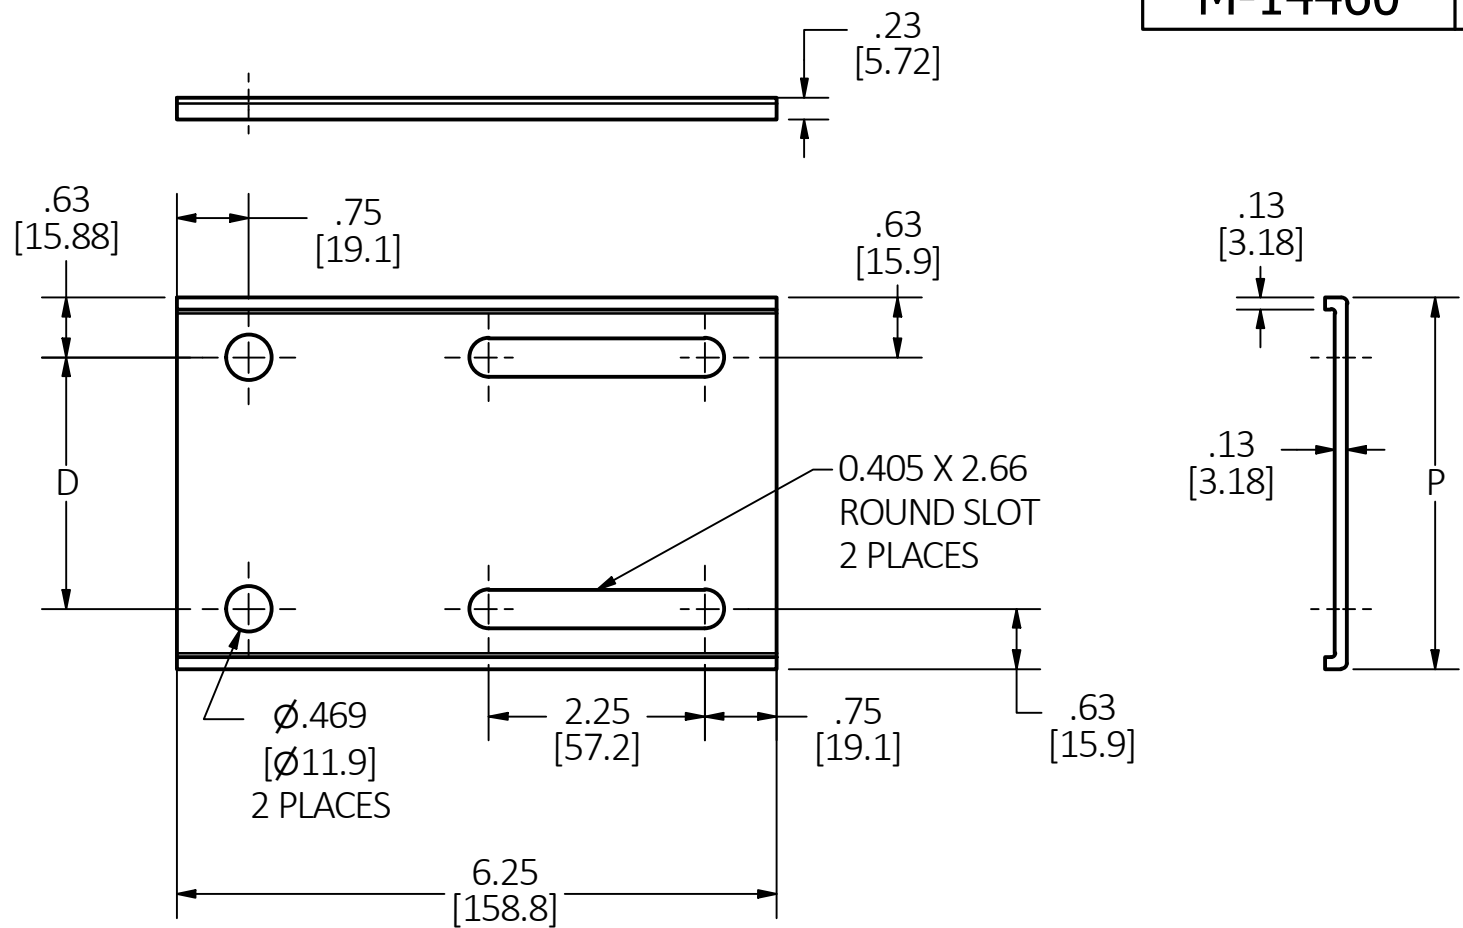

CATALOG NUMBER	TRAY SIDE RAIL HEIGHT NOMINAL (in [mm])	TRAY SIDE RAIL HEIGHT ACTUAL (in [mm])	P (in [mm])	D (in [mm])
LCE4	4 [101.6]	4.25 [108.0]	3.87 [98.3]	2.62 [66.5]
LCE6	6 [152.4]	6.25 [158.8]	5.87 [149.1]	4.62 [117.3]

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
 2. PRODUCT IS cULus CLASSIFIED.
 3. SUPPLIED WITH (2) SPLICE PLATES, FASTENERS: (4) Ø3/8" X 3/4" LONG SCREWS, (4) Ø3/8" FLANGED HEX NUTS, (4) Ø3/8" X 3/4" RIBBED-NECK SCREWS, (4) Ø3/8" LOCKING HEX NUTS & (4) Ø3/8" FLAT ROUND WASHERS.
 4. RIBBED-NECK SCREWS AND FLANGED HEX NUTS ARE TO BE INSTALLED IN THE ROUND HOLES. MACHINE SCREWS, LOCKING HEX NUTS AND ROUND WASHERS ARE TO BE INSTALLED IN THE SLOTS.
 5. CABLE TRAYS EMPLOYING THESE CONNECTORS DO REQUIRE THE USE OF BONDING JUMPERS IN ORDER TO MAINTAIN THE GROUND PATH INTEGRITY OF THE CABLE TRAY SYSTEM.
 6. INSTALL IN ACCORDANCE WITH NEMA STANDARD VE-2 "CABLE TRAY INSTALLATION GUIDELINES".
 7. FOR USE WITH CLASS 1 LADDER TRAYS.

CAGE CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
SPLICE PLATE	ALUMINUM	
SCREWS	STAINLESS STEEL	
NUTS	STAINLESS STEEL	
WASHERS	STAINLESS STEEL	

1	RELEASED PER DCN211102014008	AD	11/2/21
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE
EXPANSION SPLICE PLATE,
LADDER TRAY

	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
	TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°	DR. BY AD CHK. BY SBW SCALE 1 / 2 DATE 10/13/21