


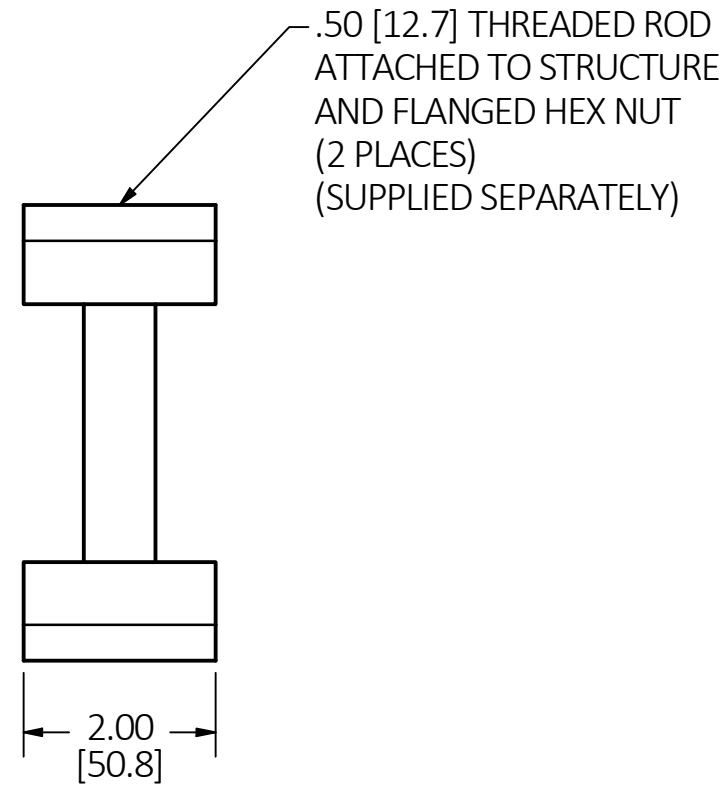

CATALOG NUMBER	TRAY SIDE RAIL HEIGHT NOMINAL (in [mm])	TRAY SIDE RAIL HEIGHT ACTUAL (in [mm])	A (in [mm])
LHC4	4 [101.6]	4.25 [108.0]	4.75 [120.7]
LHC6	6 [152.4]	6.25 [158.8]	6.75 [171.5]

1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
2. COMPLETE ASSEMBLY CONSISTS OF (1) TOP BRACKET AND (1) BOTTOM BRACKET WITH WELDED TUBE. THREADED RODS AND FASTENERS ARE SUPPLIED SEPARATELY.
3. INSTALL IN ACCORDANCE WITH NEMA STANDARD VE-2 "CABLE TRAY INSTALLATION GUIDELINES".
4. INSTALL CLAMPS ON THE OUTSIDE OF BOTH TRAY SIDE RAILS OPPOSITE ONE ANOTHER.
5. SAFE LOAD: 450 LBS [204 KG] PER CLAMP.
6. FOR USE WITH CLASS 1 CABLE TRAY SYSTEMS ONLY.

[illegible]

1	RELEASED PER DCN211102014008	AD	11/2/21
REV	DESCRIPTION	APP	DATE



WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°	DR. BY	AD	SCALE	1 / 2
	CHK. BY	SBW	DATE	10/13/21