

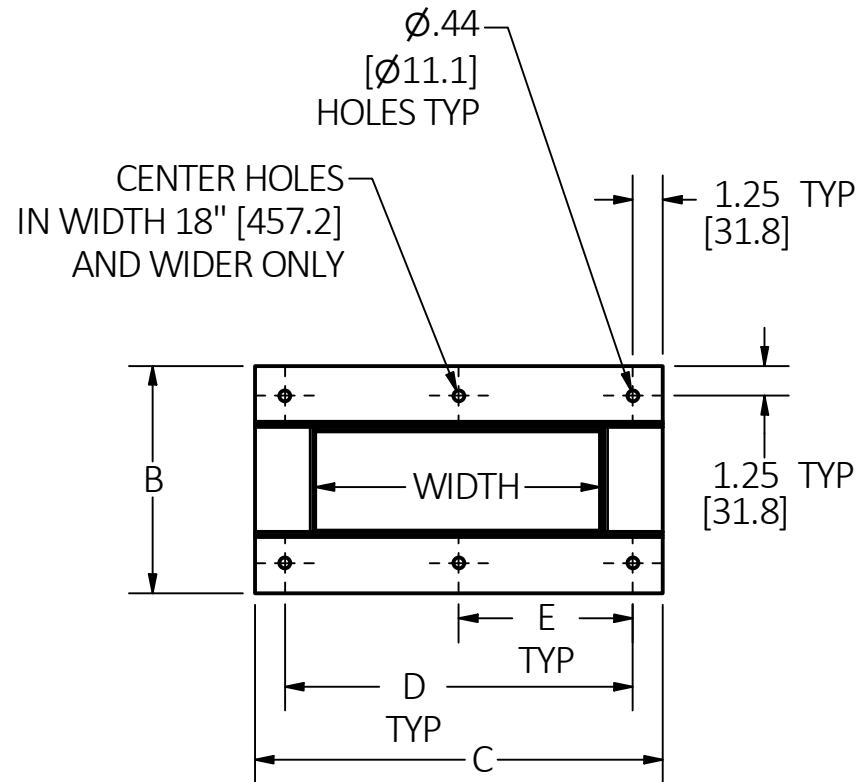


M-14469

1

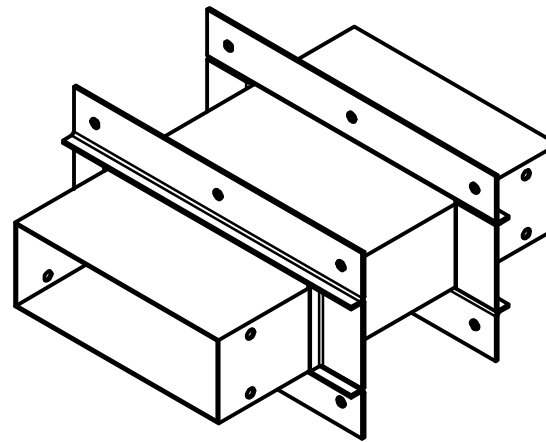

LOOSE FRAME COLLAR
(SLIDE OVER SLEEVE AFTER
SLEEVE IS INSTALLED
IN WALL OPENING)

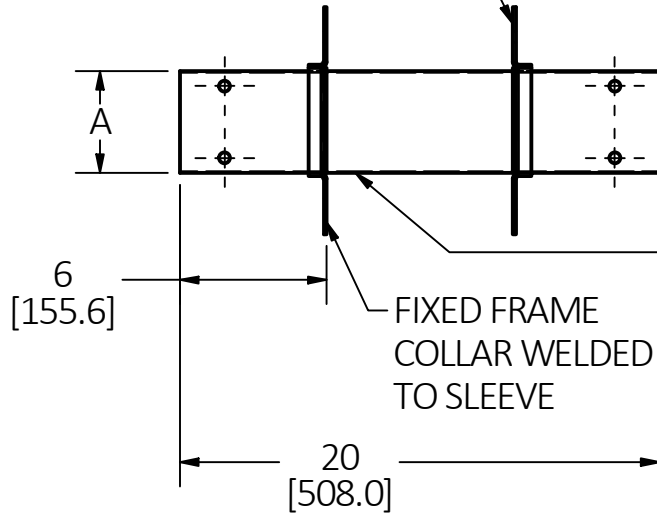

PENETRATION SLEEVE
FLAT SHEET SIDES, TOP,
AND INTERIOR BOTTOM

CATALOG NUMBER	TRAY SIDE RAIL HEIGHT NOMINAL (in [mm])	TRAY SIDE RAIL HEIGHT ACTUAL (in [mm])	WIDTH (in [mm])	A (in [mm])	B (in [mm])	C (in [mm])	HOLE QTY	D (in [mm])	E (in [mm])
LWS412	4 [101.6]	4.25 [108.0]	12 [304.8]	4.31 [109.5]	9.5 [241.3]	17.5 [444.5]	4	15 [381.0]	N/A
LWS418	4 [101.6]	4.25 [108.0]	18 [457.2]	4.31 [109.5]	9.5 [241.3]	23.5 [596.9]	6	21 [533.4]	10.5 [266.7]
LWS424	4 [101.6]	4.25 [108.0]	24 [609.6]	4.31 [109.5]	9.5 [241.3]	29.5 [749.3]	6	27 [685.8]	13.5 [342.9]
LWS612	6 [152.4]	6.25 [158.8]	12 [304.8]	6.31 [160.3]	11.5 [292.1]	17.5 [444.5]	4	15 [381.0]	N/A
LWS618	6 [152.4]	6.25 [158.8]	18 [457.2]	6.31 [160.3]	11.5 [292.1]	23.5 [596.9]	6	21 [533.4]	10.5 [266.7]
LWS624	6 [152.4]	6.25 [158.8]	24 [609.6]	6.31 [160.3]	11.5 [292.1]	29.5 [749.3]	6	27 [685.8]	13.5 [342.9]

- NOTES:
- ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
 - PRODUCT IS cULus CLASSIFIED.
 - SUPPLIED WITH (1) WALL SLEEVE WITH FIXED COLLAR, (1) LOOSE COLLAR, (4) SPLICE PLATES, FASTENERS: (16) Ø3/8" X 3/4" LONG SCREWS & (16) Ø3/8" FLANGED HEX NUTS.
 - WALL OPENING: (A + 1/4") HIGH X (WIDTH + 1/4") WIDE.
 - INSTALL IN ACCORDANCE WITH NEMA STANDARD VE-2 "CABLE TRAY INSTALLATION GUIDELINES".

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
SLEEVE	STEEL	GALVANIZED
COLLARS	STEEL	GALVANIZED
SPLICE PLATES	ALUMINUM	
SCREWS	ALUMINUM	GEOMET PLATED
NUTS	ALUMINUM	GEOMET PLATED

1	RELEASED PER DCN211102014008	AD	11/2/21
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE.
DIMENSIONS ARE IN INCHES [mm].

TITLE
WALL PENETRATION SLEEVE,
LADDER TRAY



WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°	DR. BY AD	SCALE 1 / 8
	CHK. BY SBW	DATE 10/13/21