


M-99601

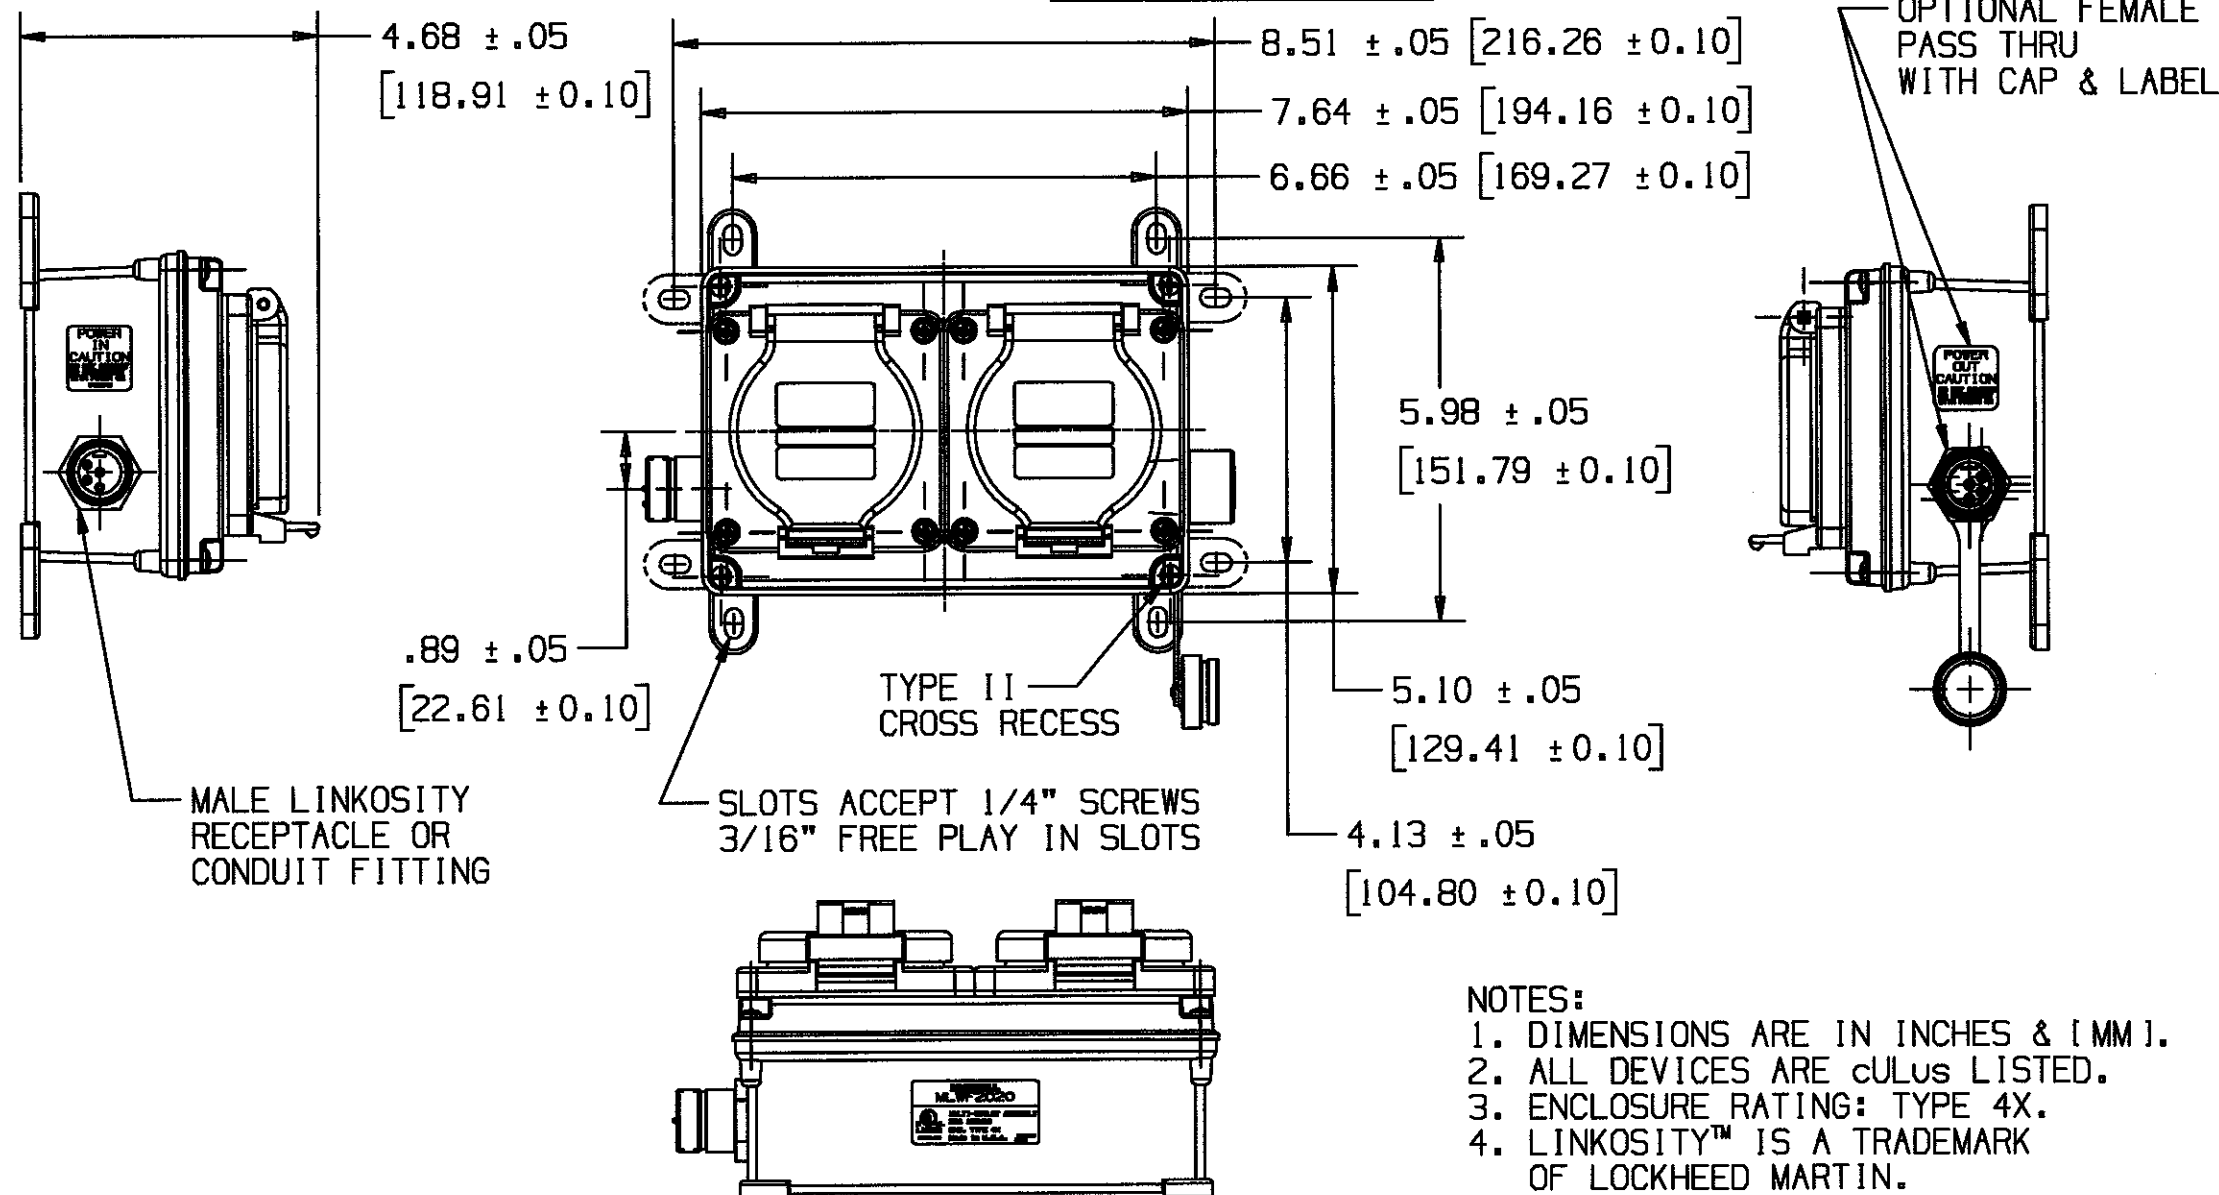

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
ALL EXTERNAL PLASTIC PARTS	UV STABILIZED POLYESTER/POLYCARBONATE BLEND	
ALL EXTERNAL SCREWS AND HARDWARE	STAINLESS STEEL	

1	RELEASED PER DCN#12718	WRV	11/9/05
---	------------------------	-----	---------

SYM	REVISIONS	APP	DATE
-----	-----------	-----	------

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
LINKOSITY PSDA (TWIST LOCK VERSIONS)


TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS	± 1/64	DR. BY	WRV
DECIMALS	± .005	APP. BY	TL5
ANGLES	± 2°	TR. BY	SCALE 1:3
		CHK'D BY	DATE 11/05

STYLE ¹	
DIGIT	DESC.
L	LINKOSITY
C	CONDUIT

TYPE ²	
DIGIT	DESC.
WF	WATER TIGHT SS RECEP
WM	WATER TIGHT SS INLET

PASS THRU ⁴	
DIGIT	DESC.
P	PASS THRU
0	NO PASS THRU




RECEPTACLE TYPE ³	
DIGIT	DESC.
01	20A 125V STRGT BLDE
02	20A 125V TWIST LOCK
03	20A 250V TWIST LOCK
04	20A 277V TWIST LOCK
05	30A 125V TWIST LOCK
06	30A 250V TWIST LOCK
07	20A 125/250V TWIST LOCK
08	20A 3 Ø 250V TWIST LOCK
09	20A 3 Ø 480V TWIST LOCK
10	30A 125/250V TWIST LOCK
11	30A 3 Ø 250V TWIST LOCK
12	30A 3 Ø 480V TWIST LOCK
13	30A 3 Ø 600V TWIST LOCK

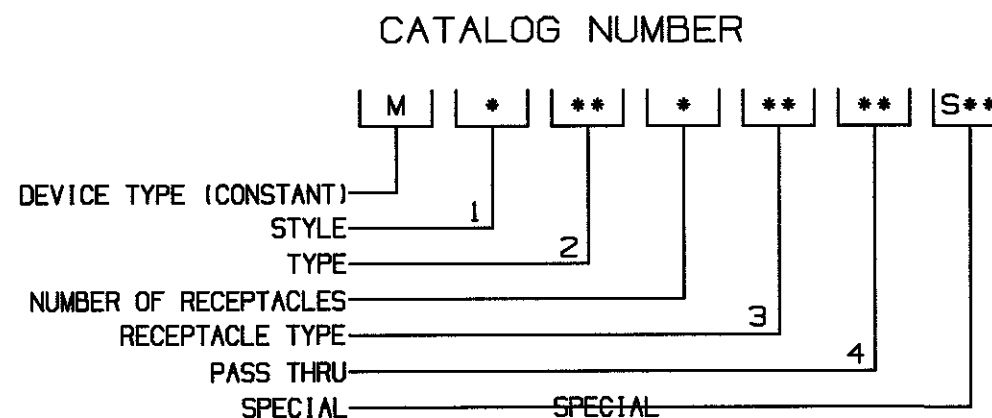

M-7316


6

NOTES: (UNLESS OTHERWISE SPECIFIED)

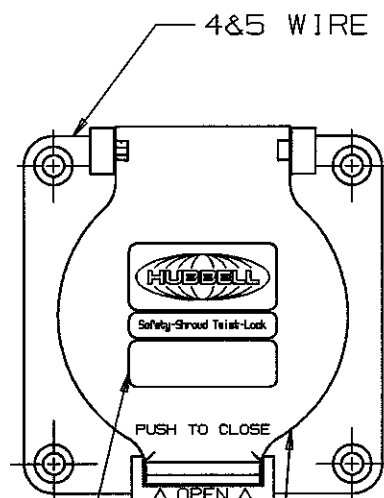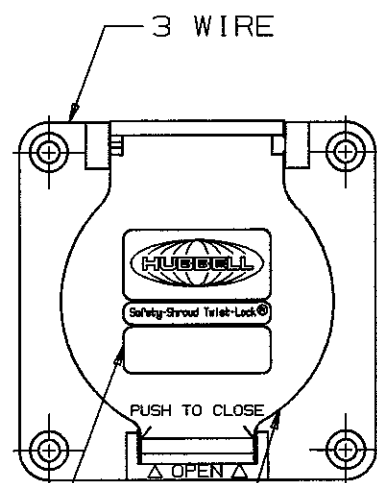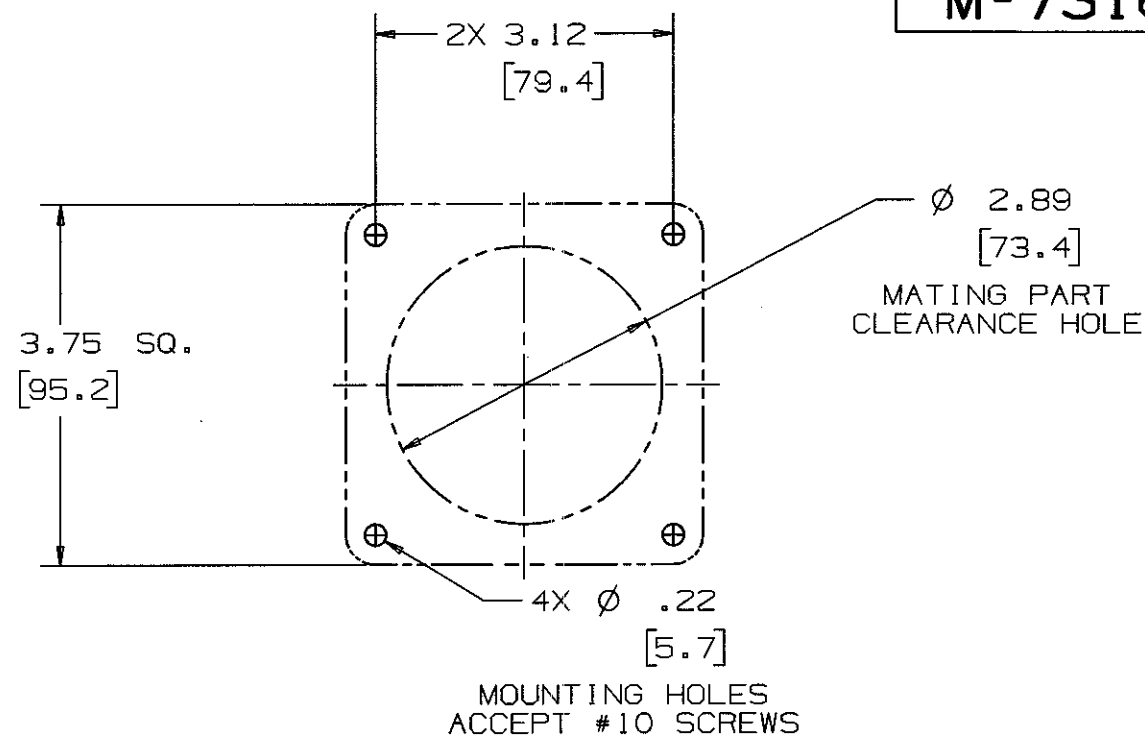1) DIMENSIONS ARE: INCHES
[MM]CATALOG No. AND
RATING LABELCATALOG No. AND
RATING LABEL

RECEPTACLE LID

RECEPTACLE LID

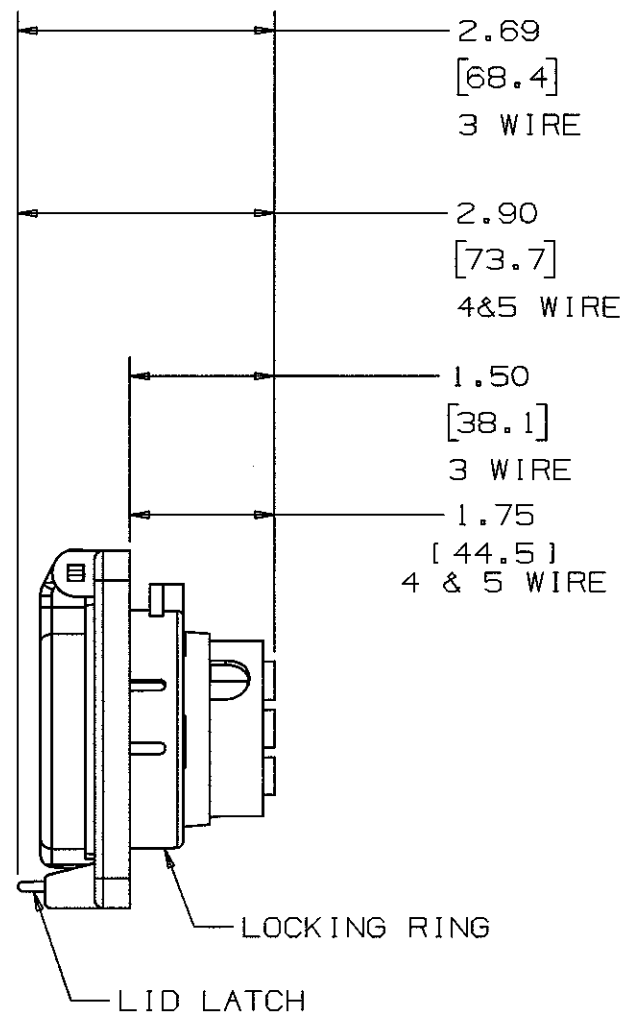

	RECEPTACLE ¹	CONFIGURATION RATING	MATING ¹ PLUG	MATING NEMA PLUG ²		IEC COLOR CODE
	CATALOG #		CATALOG #	NEMA #	HUBBELL	
3 WIRE	HBL2310SW	20A 125V	HBL2311SW	L5-20P	2311	YELLOW
	HBL2320SW	20A 250V	HBL2321SW	L6-20P	2321	BLUE
	HBL2330SW	20A 277VAC	HBL2331SW	L7-20P	2331	GRAY
4 WIRE	HBL2410SW	20A 125/250V	HBL2411SW	L14-20P	2411	ORANGE
	HBL2420SW	20A 250V 3Ø	HBL2421SW	L15-20P	2421	BLUE
	HBL2430SW	20A 480V 3Ø	HBL2431SW	L16-20P	2431	RED
5 WIRE	HBL2510SW	20A 120/208V 3ØY	HBL2511SW	L21-20P	2511	BLUE
	HBL2610SW	30A 125V	HBL2611SW	L5-30P	2611	YELLOW
3 WIRE	HBL2620SW	30A 250V	HBL2621SW	L6-30P	2621	BLUE
	HBL2710SW	30A 125/250V	HBL2711SW	L14-30P	2711	ORANGE
4 WIRE	HBL2720SW	30A 250V 3Ø	HBL2721SW	L15-30P	2721	BLUE
	HBL2730SW	30A 480V 3Ø	HBL2731SW	L16-30P	2731	RED
	HBL2740SW	30A 600V 3Ø	HBL2741SW	L17-30P	2741	BLACK
5 WIRE	HBL2810SW	30A 120/208V 3ØY	HBL2811SW	L21-30P	2811	BLUE
	HBL2830SW	30A 347/600V 3ØY	HBL2831SW	L23-30P	2831	BLACK

¹TYPES 4, 4X, 12 WHEN CLOSED OR CONNECTED²TYPES 1 WHEN CONNECTED

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
RECEPTACLE	PBTP	
HOUSING, LID,	PBTP	
LOCKING RING	PBTP	
GASKET	CBR	
DRIVE SCREW	STEEL	ZINC PLATED
SCREWS	SST	

6	ADDED HBL2830SW TO TABLE PER DCN 15166 RCM	DJP	9/24/08
5	ADDED DRIVE SCREW TO LIST OF PARTS, NOTE 1 AND DUAL DIMENSIONING; "SST" WAS "302 SS". REMOVED ±.015 FROM ALL DIM'S. ALL INCH DIM'S WERE THREE PLACE DECIMALS PER DCN #13355. JMN	DJP	1/23/07
4	CHANGED DIMENSION FROM Ø3.100-±.015 TO Ø2.890±.015 PER DCN 8855 CAC	CAC	8/3/01
3	CONVERTED ALL DIMS TO 3 PL DECIMAL AND ADDED TOL PER DCN #7772. AMZ	DB	8/18/00
2	RELEASED FOR PRODUCTION; ADDED UL LISTED & CSA CERTIFIED TO DWG; ADDED "CATALOG No. AND" TO "RATING LABEL"; APPENDED TABLE PER DCN #3070 DJG	JCA	11/16/94
1	RELEASED 2777-9	JCA	10/11/94
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICETITLE SAFETY-SHROUD™
TWIST-LOCK®
RECEPTACLESTOLERANCES UNLESS
OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CTDR. BY EEM
TR. BY
CHK'D BY JCA
APP. BY JCA
SCALE 1/2
DATE 10/5/94U.L. LISTED
CSA CERTIFIED