


M-9456

2

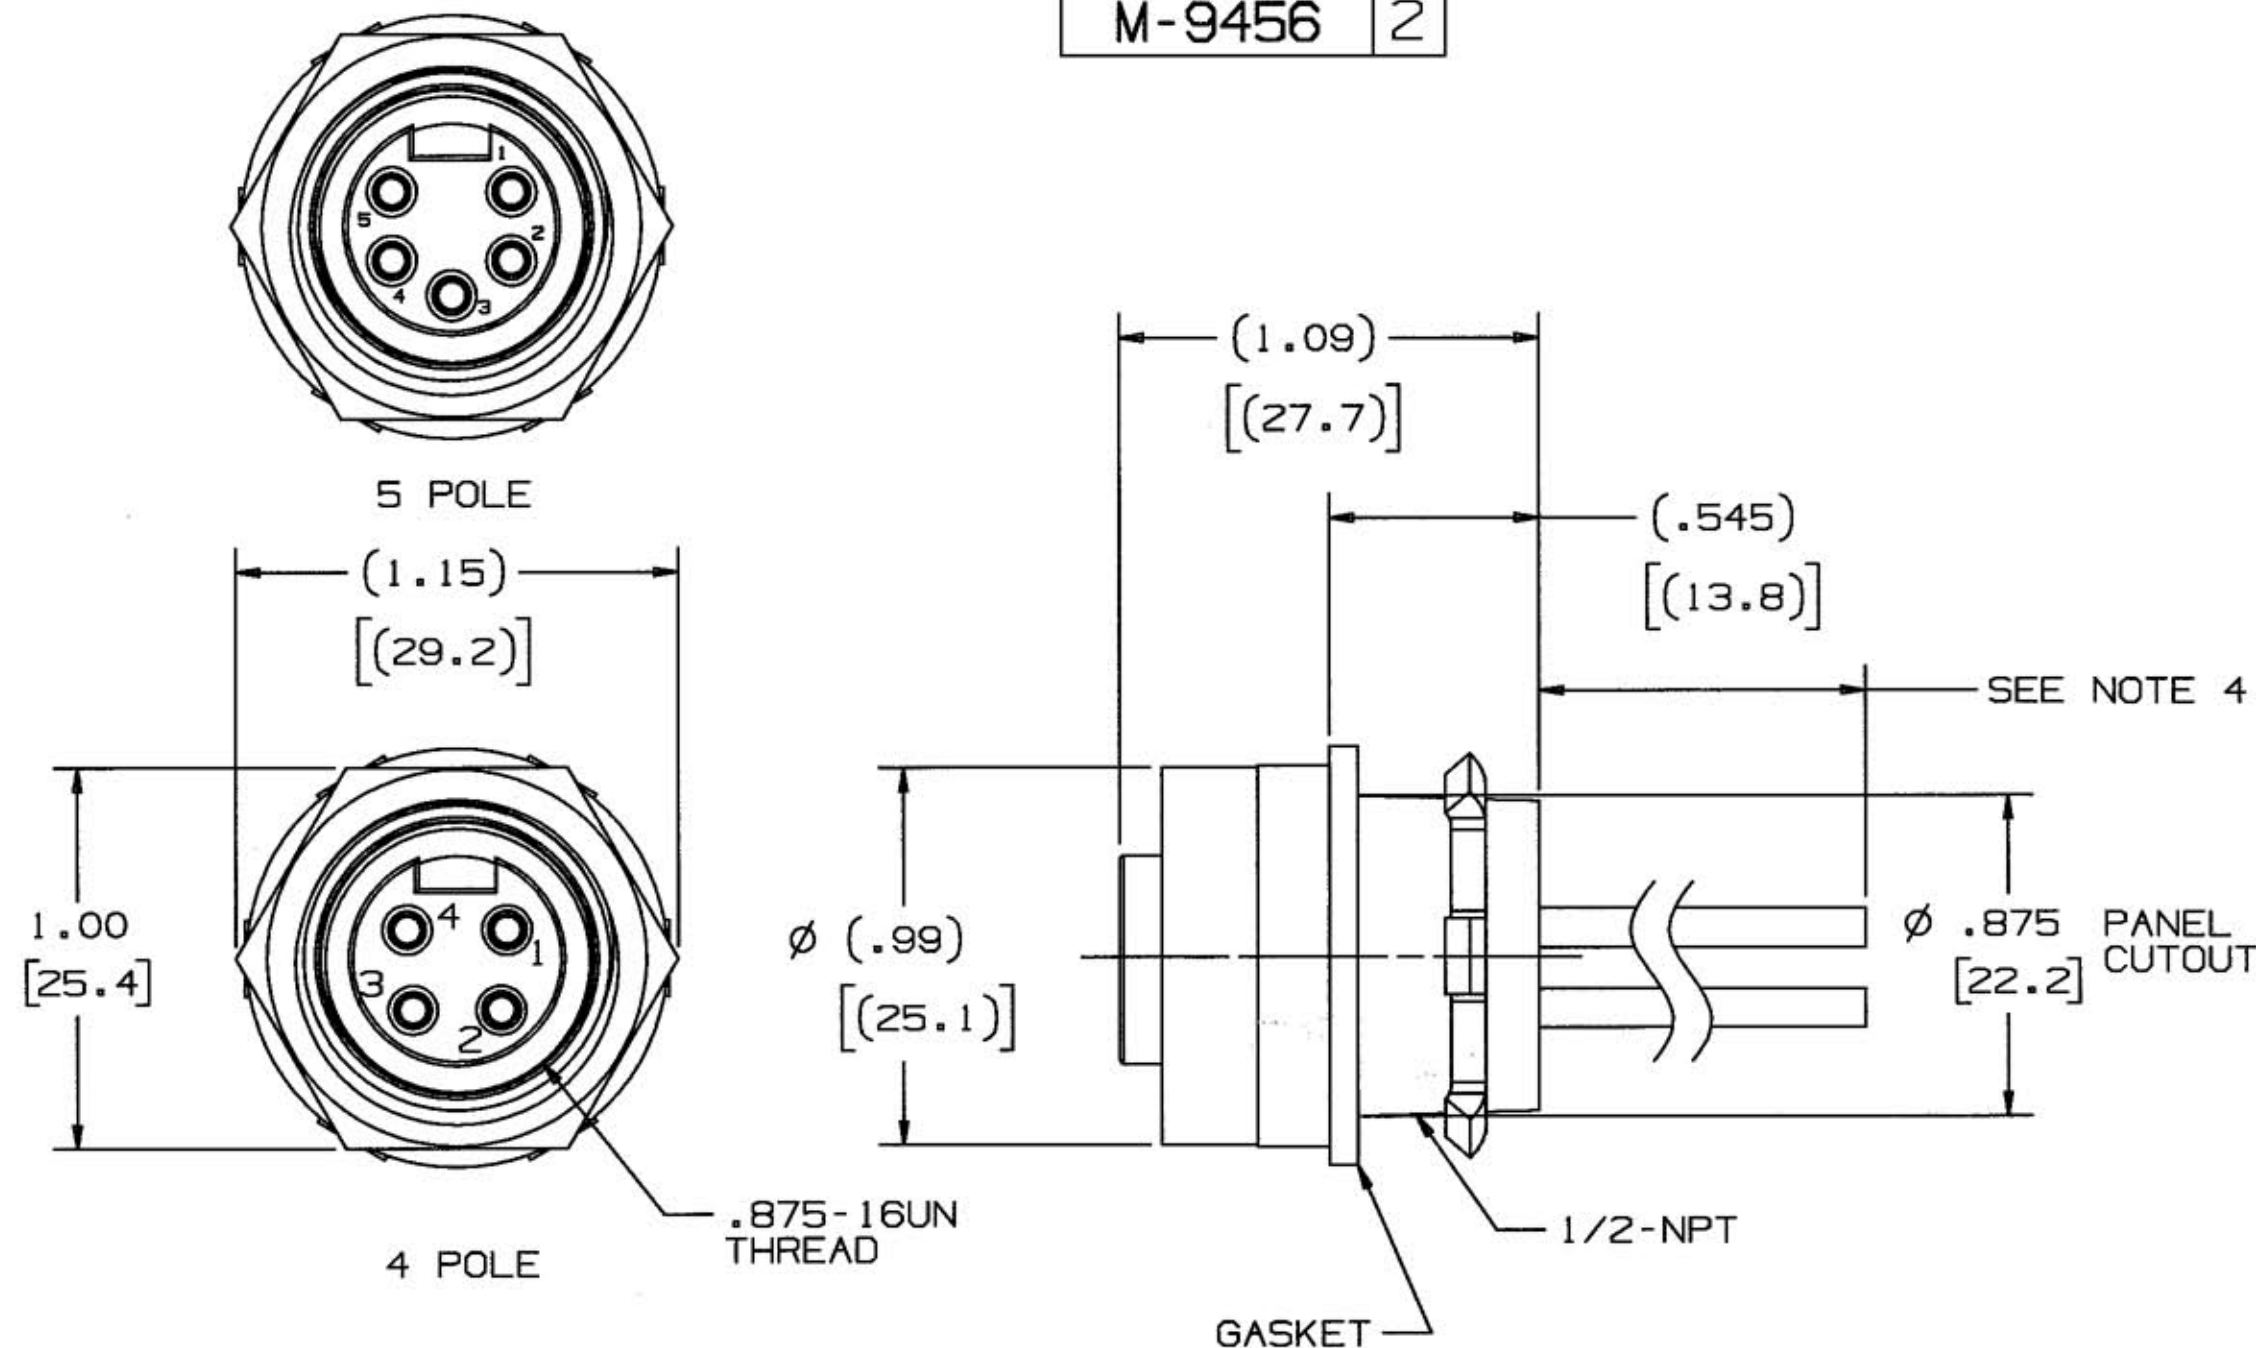

NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1) DIMENSIONS ARE IN INCHES [MM].
- 2) ALL DEVICES ARE 10A. 600VAC.
- 3) ALL DEVICES ARE U.L. LISTED AND ARE NOT FOR CURRENT RUPTURE.
- 4) THE "XXX" IN CATALOG NUMBER DENOTES LENGTH OF WIRE IN FEET. RF1004PG 0 0 5 HAS FIVE FEET OF WIRE.

CODE 74545

CATALOG NUMBER	NUMBER OF POLES	POSITION NUMBER	COLOR	CONDUCTOR MARKING
RF1004PGXXX	4	1	ORANGE	P1
		2	ORANGE	P2
		3	ORANGE	P3
		4	ORANGE	P4
RF1005PGXXX	5	1	ORANGE	P1
		2	ORANGE	P2
		3	ORANGE	P3
		4	ORANGE	P4
		5	ORANGE	P5

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
RECEPTACLE SHELL	BRASS	NICKEL
INSULATOR	NYLON	WHITE
RETAINER	NYLON	WHITE
LOCKNUT	STEEL	ZINC
O-RING	RUBBER	BLACK
GASKET	POLYETHYLENE	YELLOW
SOCKET CONTACT	COPPER ALLOY	GOLD OVER Pd/Ni
WIRE	16 AWG PVC	ORANGE

2 ADDED "SEE TABLE", 1.0 DIM., DUAL DIM.'S, NOTES 1-3, & WIRE BREAK LINES. REMOVED "AMPS" COLUMN FROM TABLE AND "600V" FROM TITLE. "SEE NOTE 4" WAS "SEE NOTE 1"; NOTE 4 WAS NOTE 1 PER DCN #12063. JMN GPH 10/29/04

1 RELEASED PER DCN 11937. GPH 9/15/04 MJM GH

SYM REVISIONS APP DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
FEMALE RECEPTACLE
HEX MOUNT

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS $\pm 1/64$
DECIMALS $\pm .005$
ANGLES $\pm 2^\circ$

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY MJM APP. BY GPH
TR. BY SCALE NONE
CHK'D BY GPH DATE 9/15/04

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐NON-REPAIRABLE ☒

B

M-9456

2