


M-8939

2

HOUSING (OVERMOLDED WITH
CONTACTS & BUSS BAR HIDDEN
& NOT SHOWN)

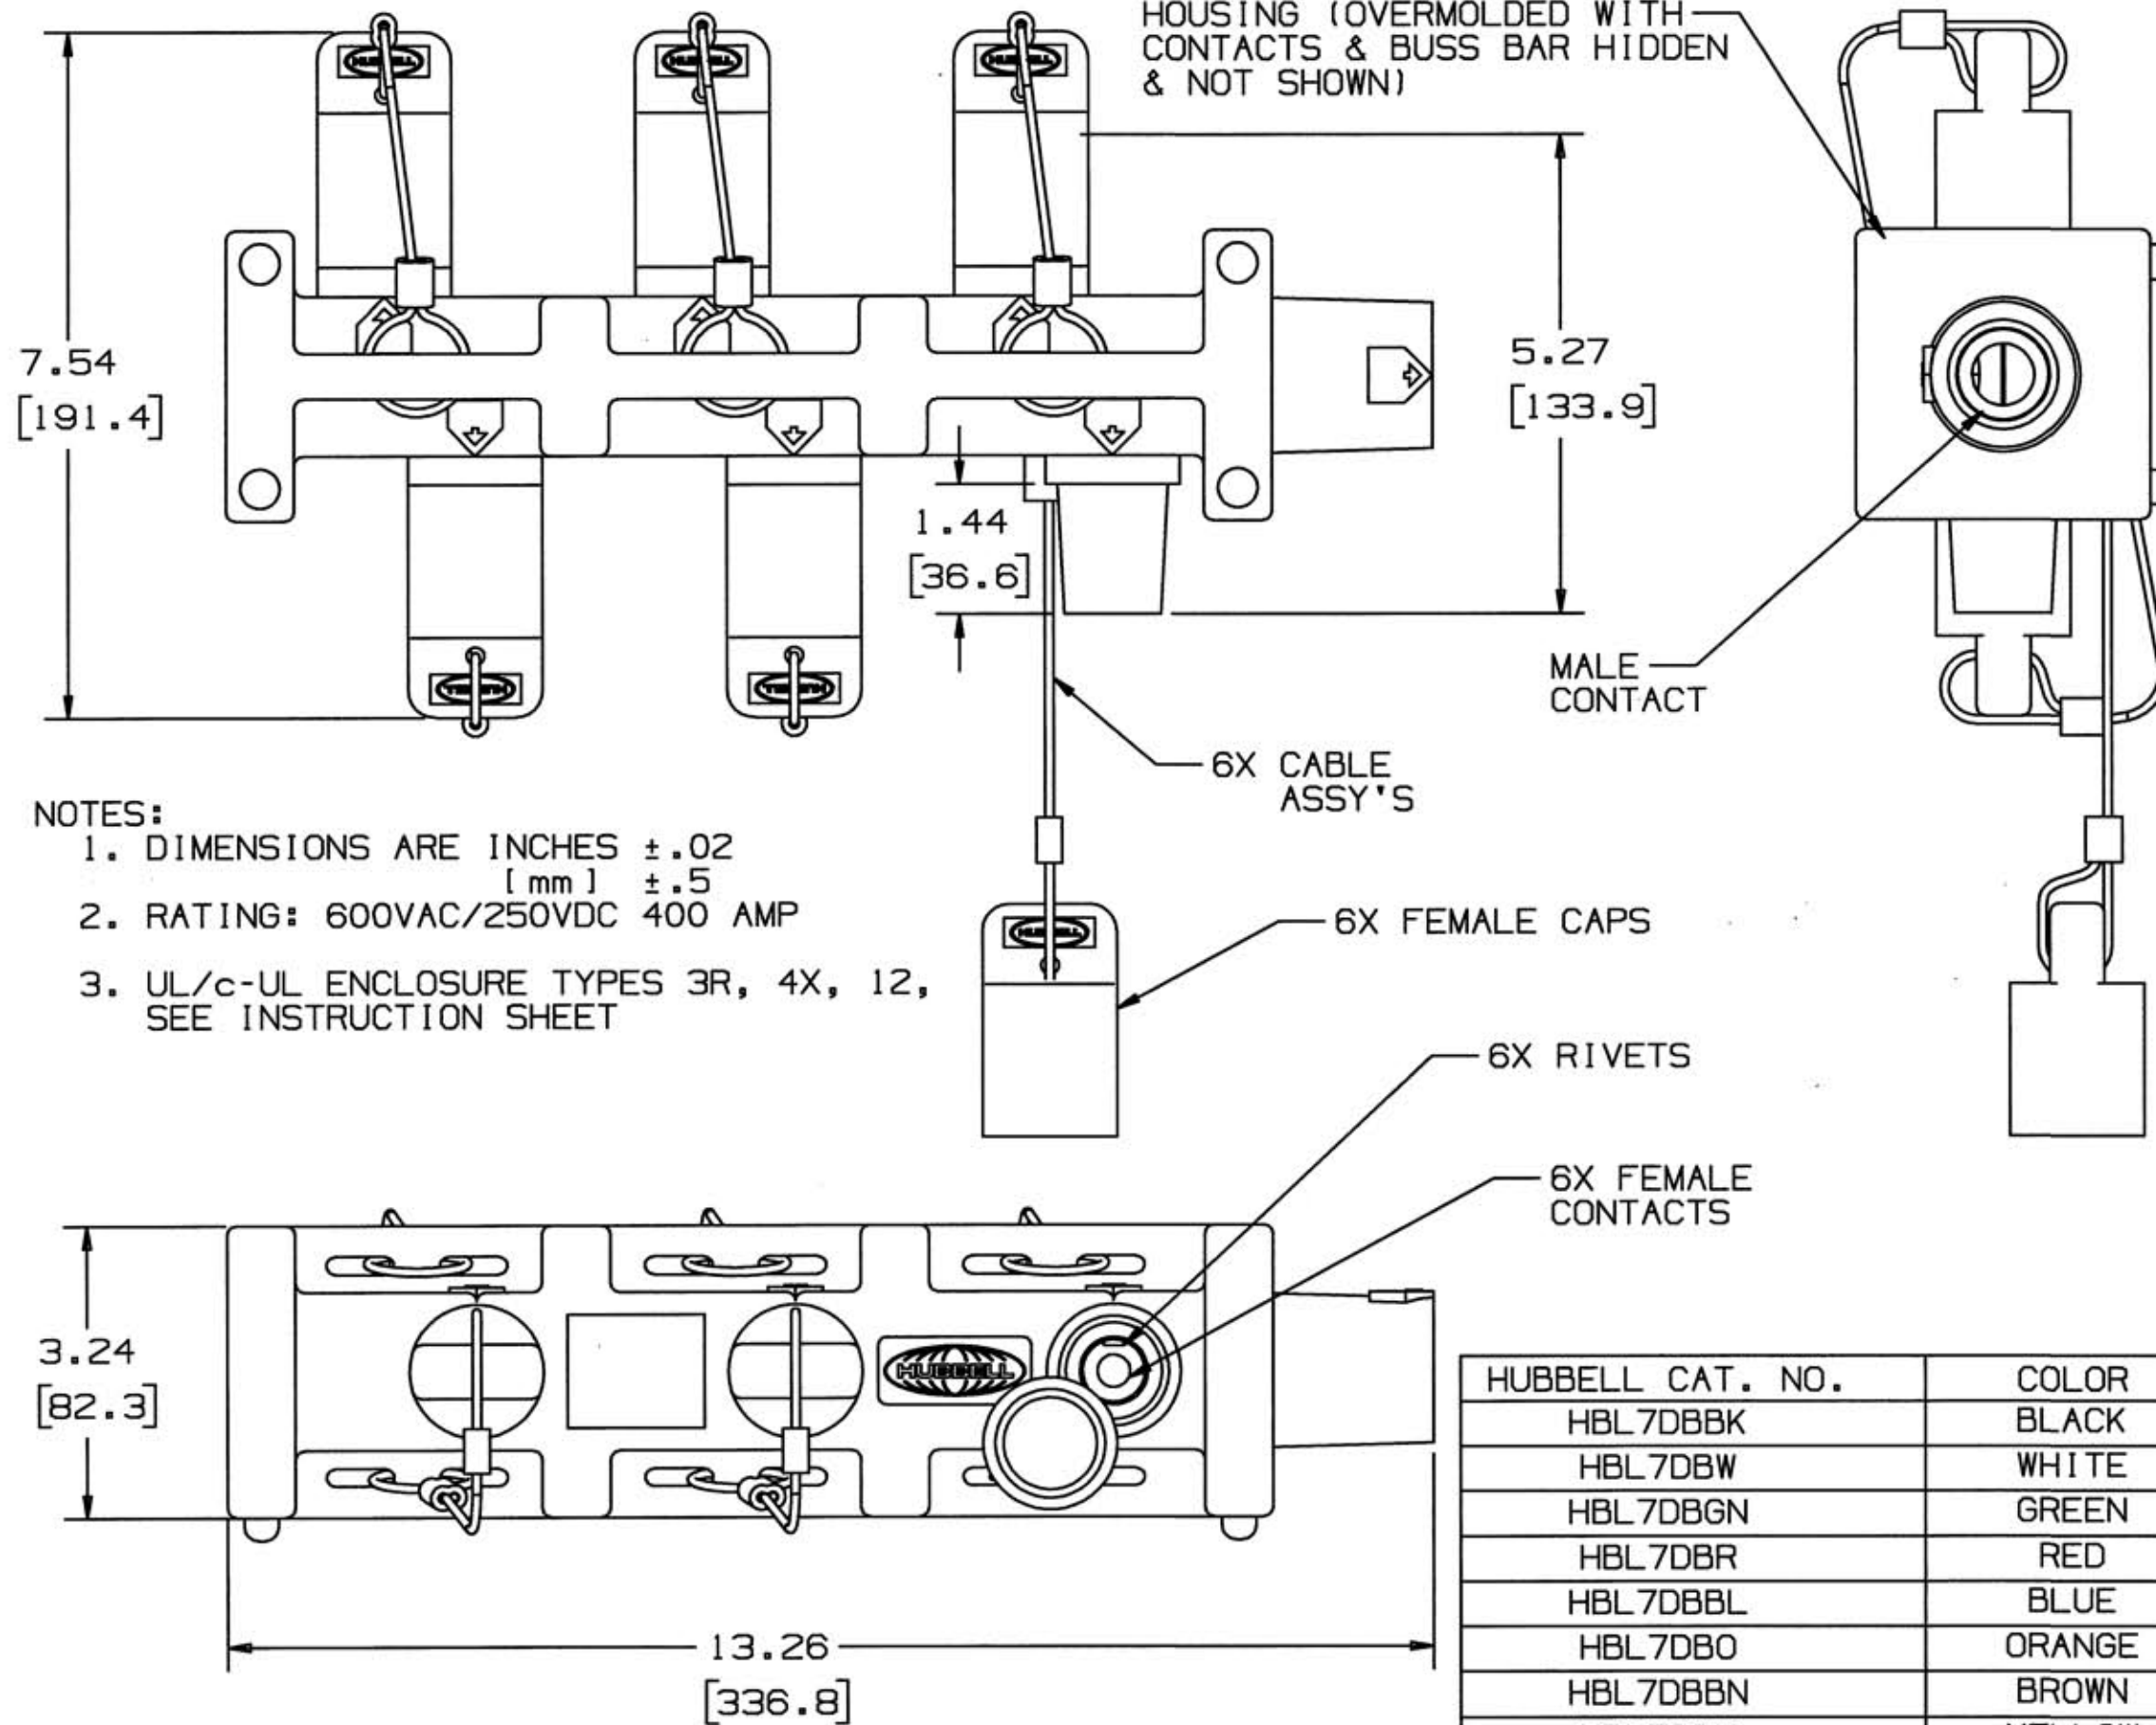

NOTES:

1. DIMENSIONS ARE INCHES $\pm .02$
[mm] $\pm .5$
2. RATING: 600VAC/250VDC 400 AMP
3. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12,
SEE INSTRUCTION SHEET

HUBBELL CAT. NO.	COLOR
HBL7DBBK	BLACK
HBL7DBW	WHITE
HBL7DBGN	GREEN
HBL7DBR	RED
HBL7DBBL	BLUE
HBL7DBO	ORANGE
HBL7DBBN	BROWN
HBL7DBY	YELLOW

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
FEMALE CONTACT	BRASS	
RIVET	BRASS	
MALE CONTACT	BRASS	
BUSS BAR	BRASS	
FEMALE CAP	TPE	SEE TABLE
CABLE ASSY'S	CABLE SLEEVE	NATURAL CLEAR ANODIZE

2

UPDATED ASSY. TO SHOW
NEW CABLE ORIENTATION
6X FEMALE CAPS WAS
6X PROTECTIVE CAP ASSY'S
LIST OF PARTS
DESCRIPTION CABLE ASSY'S
WAS CAP ASSY.
LIST OF PARTS FINISH
NATURAL COLOR WAS BLACK
ADD $\pm .02$ & $\pm .5$ TO NOTE 1
CHANGED NOTE 3
PER DCM 11484 MJ TB

1/11/05

1

RELEASED PER DCN 10992
MJM TB

6/25/03

SYM REVISIONS APP DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
SINGLE POLE
DISTRIBUTION BLOCK

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS $\pm 1/64$	DR. BY MJM	APP. BY
DECIMALS $\pm .005$	TR. BY	SCALE 1:1
ANGLES $\pm 2^\circ$	CHK'D BY	DATE 6/11/03