



**KK4A40U4N, AL Universal Terminal, 4
Conductor, 300-800 kcmil, 4-Hole, 1/2"
Stud, 1.75" Spacing, 8 Screws, Al/Cu Rated**

By Burndy
Catalog # [KK4A40U4N](#)

Aluminum Universal Terminal, 4 Conductor, 4 Hole, 300-800
kcmil, 1/2" Stud, 1.75" Stud Hole Spacing, 8 Screws, Al/Cu Rated,
Tin Plated

Features

- Dual rated panelboard lugs constructed from high strength extruded aluminum alloy , electro tin-plated to provide low contact resistance

Application


For Aluminum and Copper Conductors

Specifications

Buy American Compliant	Yes
Certification - cULus	No
EU RoHS Indicator	No
Certification - UL Recognized	No
Industry Standard(s)	UL 486A-486B
Buy America(n) Qualified	• Buy America Compliant (All status valid till December 2025) • Buy American Act Compliant (All status valid till December 2025) • BABA Compliant (All status valid till December 2025)
Certification - ETL	No
Standards - Industry Standards Met	UL 486A-486B
Standards - RoHS Compliance Status	NC
Certification - CSA Approved	Yes
UL Listed	Yes
Certification - UL Listed Direct Burial	No

Conductor

Number Of Wires	4
Conductor - AL Str Size	• 300 kcmil • 336 kcmil • 350 kcmil • 397 kcmil • 400 kcmil • 450 kcmil • 477 kcmil • 500 kcmil • 550 kcmil

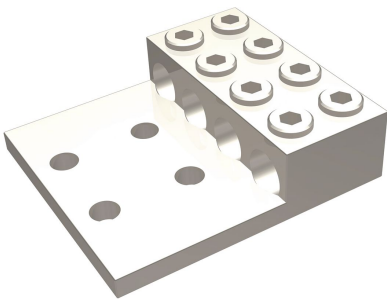

- 556 kcmil
- 600 kcmil
- 636 kcmil
- 650 kcmil
- 700 kcmil
- 715 kcmil
- 750 kcmil
- 795 kcmil
- 800 kcmil

Conductor - AL Str Size Range	300-800 Kcmil
Number Of Conductors	4
Conductor Size	300-800 KCMIL
Conductor - Copper Str Size Range	300-800 Kcmil
Conductor Type	• CU C Str-Size • AL C Str-Size

Configuration

Physical Attribute - Number of Holes	4
Connector Type	Parallel Set-Screw

Dimensions

Dimension - E Spacing between Holes fraction	1-3/4 in
Dimension - F Width Center to Center inch	1.75 in
Dimension - L Length Overall mm	157 mm
Dimension - Pad Width inch	6.04 in
Dimension - Height inch	1.89 in
Dimension - Height mm	47.8 mm
Dimension - Hole Size inch	0.56 in
Dimension - Hole Size mm	14 mm
Dimension - Stud Size inch	0.56 in
Dimension - Bolt Hole Size inch	0.56 in
Dimension - Bolt Size fraction	1/2
Dimension - Length Overall inch	6.19 in
Dimension - N inch	0.63 in

General

Material - Hardware	Aluminum
Sub Brand	UNIVERSAL TERMINAL

Plated	Y
Type	Bolted Lugs & Terminals
UPC 14 Digit GTIN	00781810601099
Material	Aluminum
Plating Type	Tin Plated
UPC	781810601099

Logistics	
Minimum Pack Quantity	1
Carton Quantity	6
Pallet Quantity	6

Product Assets

[Catalog \[English\]](#)



A Hubbell brand