




YAV14T3BOX, Uninsulated Ring Terminal For 16 - 14 AWG

By Burndy

Catalog # [YAV14T3BOX](#)

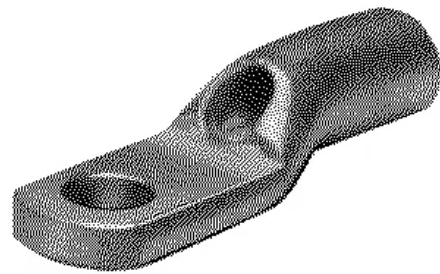

Uninsulated Ring Terminal For 16 - 14 AWG.

Features

- Manufactured from seamless pure electrolytic copper tubing to provide maximum conductivity, low resistance and excellent ductility for crimping
- Seamless tubular crimp barrel design - No seams to split resulting in a very high quality electrical connection, also can be used on solid conductor
- Double thick tongue structurally a very strong terminal tongue
- Produced from tubular copper, extra copper material assures the compression connector will operate cooler than the conductors it connects
- Internally bevelled barrel for easy cable entry, especially for flexible conductors
- Inspection hole provides easy visual check for proper conductor insertion
- Electro-tin plated for a long lasting durable corrosion resistance

General

Catalog Number	YAV14T3BOX
Connector Type	Ring Terminal
Feature - Barrel Style	Chamfered
Feature - Barrel Type	Standard
Material	Copper
Physical Attribute - Number of Holes	1
Physical Attribute - Tongue Type	Ring
Plated	Y
Plating Type	Tin - Electro Plated
Trade Name	HYLUG™
Type	Ring Tongue
UPC	781810533604
UPC 14 Digit GTIN	00781810533604

Dimensions

Dimension - B Length fraction	1/4 in
Dimension - B Length inch	0.25 in
Dimension - Bolt Size fraction	5/16
Dimension - D inch	0.58 in
Dimension - L Length Overall mm	25 mm

Dimension - Length Overall inch	0.99 in
Dimension - N inch	0.25 in
Dimension - Outside Diameter inch	0.16 in
Dimension - Pad Width inch	0.44 in
Dimension - Strip Length inch	9/32 in
Dimension - Stud Size inch	5/16 "
Dimension - Z (inch)	0.32 in

Conductor Related

Conductor - Copper Solid Size	20 ;18 AWG;17 AWG;16 AWG;15 AWG;14 AWG;13 AWG;12 AWG
Conductor - Copper Solid Size Range	20 AWG -12 AWG
Conductor - Copper Str Aircraft Size	AN 20;AN 18;AN 16;AN 14
Conductor - Copper Str Aircraft Size Range	AN 20-AN 14
Conductor - Copper Str Size	20 AWG;18 AWG;16 AWG;14 AWG
Conductor - Copper Str Size Range	20 AWG - 14 AWG
Conductor Size	16 - 14 AWG
Conductor Type	• CU C Solid-Size • CU C Str-Size

Certifications And Compliance

Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	UL467
Standards - Industry Standards Met	UL486
Standards - RoHS Compliance Status	CM
UL Listed	Yes

Logistics

Carton Quantity	1200
Minimum Pack Quantity	100
Pallet Quantity	99999

Product Assets

[Catalogs - BURNDY Master Catalog - Section B - Small Terminals](#)
[Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)
[Customer Notices - Prop 65 Notice](#)
[Interactive Catalog - BURNDY Full-Line Digital Catalog](#)

[Product Cross Section Image\(s\) - BUR_YAV10T3BOX_LineArt](#)
[Sales Drawings - 50094160](#)
[Specifications - YAV14T3BOX](#)



A Hubbell brand

©2025 Hubbell Incorporated. All rights reserved
BRDY-YAV14T3BOX-SPEC-EN | REV 7/2025