



GR Series, 6 X 6 X 12.25, Class I, II, III, BCDEFG, Cast Aluminum, Type 4, Meter Housing

By Killark
Catalog # GRM-375L52

GR Series, 6 X 6 X 12.25, Class I, II, III, BCDEFG, Cast Aluminum, Type 4, Meter Housing

Features


- Compact rectangular enclosures with threaded lens covers for mounting of 3", 3-1/2", 4" or 4-1/2" round or rectangular instruments such as ammeters and voltmeters.
- High strength, lighter weight, corrosion resistant copper free cast aluminum construction and tempered soda lime glass, cemented in place.
- Cover o-ring, Nitrile (BUNA-N) material, supplied standard supplied standard for a Type 4X rating.
- Cast mounting lugs are standard on all boxes.
- Internal ground screw supplied on all boxes.
- Electrostatically applied gray powder epoxy/polyester finish on exterior of box and cover.
- Two 3/4"-14 NPT drilled and tapped conduit openings, one top and one bottom, are standard.
- Internal mounting pan is attached to inside back of box with spacers for mounting meter.

Application

Use GR Series Instrument Enclosures for mounting of 3", 3-1/2", 4", or 4-1/2" round or rectangular instruments such as ammeters and voltmeters. Two 3/4"-14 NPT drilled and tapped conduit openings, one top and one bottom, are standard. Internal mounting pa

Specifications

UL File Number	E10514 / E83696
Buy America(n) Qualified	Contact Manufacturer

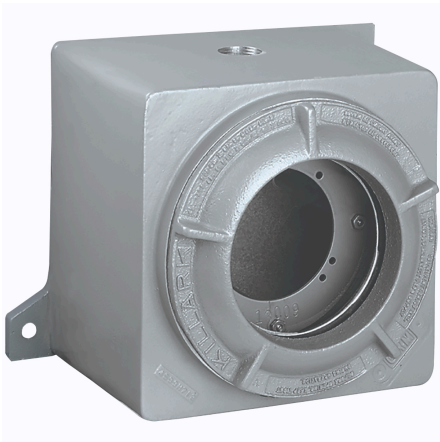

CSA File Number	LR11716
Hazardous Rating(s)	• Class I, Divisions 1 & 2, Groups B, C, D • Class I, Zones 1 & 2, Groups IIB+H2, IIA • Class II, Divisions 1 & 2, Groups E, F, G • Class III, Divisions 1 & 2
EU RoHS Indicator	Contact Manufacturer

Dimensions

Height	7.25 in
Width	9.75 in
Length	8.5 in
Gross Weight with Packaging	14.73
Dimensions	8.5 in x 9.75 in x 7.25 in

General

Color	Gray
UPC	783936233475
Type	Enclosure & Lens Cover
Material	Copper-free aluminum
Cover Type	Threaded
Series	GR Enclosures Series

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[English\]](#)