



XCS-OB13-C - XCS Series, AL Momentary Contact Push Button & 120V Pilot Lt Cvr w/ Device, Red Button Stop Nameplate, Red Lens Nameplate, 1NC

By Killark
Catalog # [XCS-OB13-C](#)

XCS Series - Aluminum Momentary Contact Push Button And 120V Pilot Light Cover With Device - Red Button With "Stop" Nameplate - Red Lens With Nameplate To Be Specified - 1NC Contact Rating

Features

- Copper free cast aluminum alloy.
- Ground flange joint between bolted cover and box provide required flame path.
- Push button, selector switches and pilot light operator bodies are copper-free aluminum.
- Operating shaft in both push buttons and selector switches are stainless steel.

Application

Hazardous locations due to the presence of flammable gases or vapors, combustible dusts, or easily ignitable fiber or flyings. Installations at petroleum refineries, chemical and petrochemical plants, and other processing or storage facilities where simil

Specifications


UL File Number	E53360
Buy America(n) Qualified	BABA Compliant (All status valid till December 2026)
CSA File Number	LR11714
Hazardous Rating(s)	• Class I, Divisions 1 & 2, Groups C, D • Class I, Zones 1 & 2, Groups IIB, IIA • Class II, Divisions 1 & 2, Groups E, F, G • Class III, Divisions 1 & 2
EU RoHS Indicator	Contact Manufacturer

Conductor

Number Of Poles	1
-----------------	---

Configuration

Back Box Type	SWB
---------------	-----

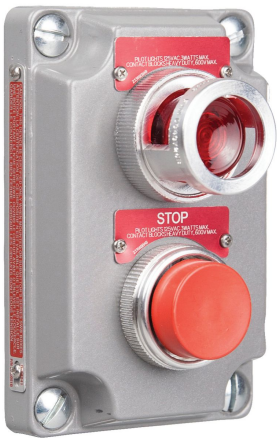

Current

Frequency Rating	50/60 Hz
Amperage Rating	10 A
Contact Rating	• NEMA A600 - 7200 VA (make), 720 VA (break), 10A cont. @ 600V AC (thermal) • NEMA Q300 - 69 VA (make & break), 2.5A cont. @ 250V DC (thermal).

Dimensions

Height	4 in
Width	5.75 in
Length	7.5 in
Gross Weight with Packaging	1.5
Depth	1-3/4 in
Dimensions	7.5 in x 5.75 in x 4 in

General

Color	Green P.B., White Light
UPC	783936890258
Type	Aluminum Cover With Pilot Light And Push Button
Material	Copper-free aluminum
Series	XCS Series

Operational

Operating Cycles	10,000 operations
Actuator	Momentary Pushbutton
Action	SP (per circuit)

Product Assets

[Catalog \[English\]](#)
[Installation Manual \[French, English\]](#)