
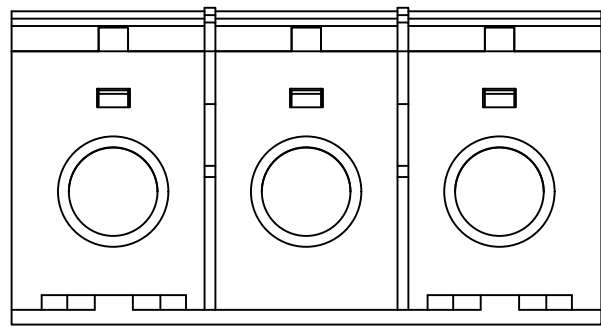
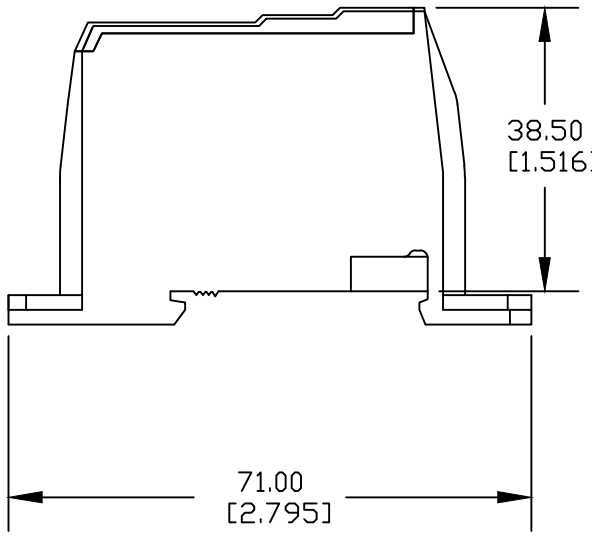


PART NO.
GDB61753Z

LTR	DATE	REVISION	CHK	APD
A	4/17/18	519180GCP - RELEASE MRY		

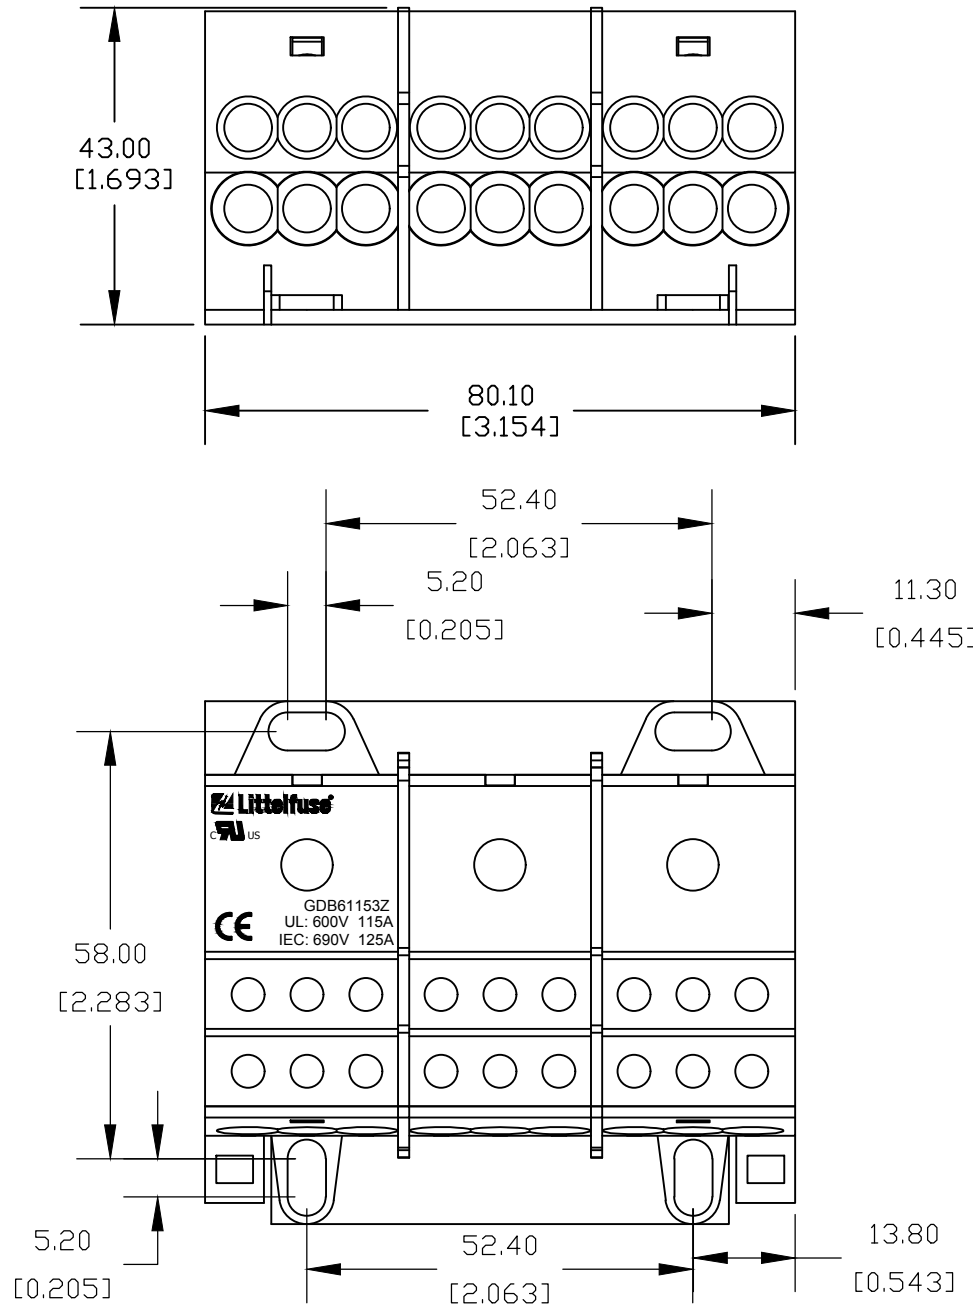

- NOTES:
1. AGENCY INFORMATION:
UL FILE NO. E309688
 2. MATERIALS:
INSULATOR-THERMOPLASTIC
CONNECTOR-BRASS
 3. TERMINATION:
LINE: 8AWG-2/0
LOAD: 4-14 AWG
 4. RATINGS:
600V
MAXIMUM AMP PER POLE-175A
 5. TORQUE:
LINE: 35.5 IN-LB
LOAD: 17.5 IN-LB

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
●	DENOTES CRITICAL CHARACTERISTICS.			
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE			
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.			
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.			C
COPIES TO		MATL SPEC		
1	9	18	FINISH	
2	10	19		
3	12	20	DRW M YORK	
4	13	21		
5	14	23	CHK	
6	15	33		
7	16	43	APPD	
8	17	53		
LBS/M				
TITLE				
GDB6175 SERIES DISTRIBUTION BLOCK OUTLINE				
Littelfuse® CHICAGO, ILLINOIS 60631		REVISION A	DRWG. NO. 01-GDB6175	FINAL

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED