



Contractor-grade Plastic (Non- Dimmable) A-Shape Lamps

9A19/CNG/830/FR/P/E26/ND 4/1CT

Contractor grade, LED, A19, 60 W, E26, 3000 K, 800 lm, 15000 hour(s), Plastic

Most affordable A19 lamp ideal for residential, back of house closets.

Product data

General Information	
Cap-Base	E26
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	150 degree(s)
Luminous Flux	800 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	88 lm/W
Color Consistency	<6


Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power Consumption	9 W
Lamp Current (Nom)	165 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	120 V

Contractor-grade Plastic (Non-Dimmable) A-Shape Lamps

Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Bulb Shape	A19
UL Wet/ damp/ dry location	Damp location
Net Weight (Piece)	0.023 kg
Approval and Application	
EU RoHS compliant	Yes
T20 compliant	No



Ambient temperature range	-20 to +45 °C
Application Conditions	
can it be used in closed luminaires	No
Product Data	
Order product name	9A19/CNG/830/FR/P/E26/ND 4/1CT
Full product name	9A19/CNG/830/FR/P/E26/ND 4/1CT
Order code	929002475464
Material Nr. (12NC)	929002475464
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677589974
Numerator - Packs per outer box	4
EAN/UPC - Case	50046677589979

Dimensional drawing



Product	D	C
9A19/CNG/830/FR/P/E26/ND 4/1CT	60 mm	104 mm

Photometric data

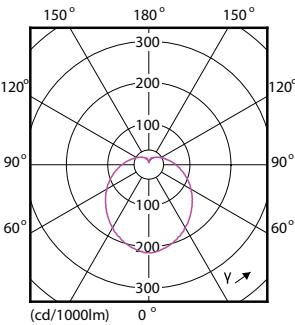


General uniform lighting - 9A19/CNG/830/FR/P/E26/ND 4/1CT

Light Distribution Diagram - 9A19/CNG/830/FR/P/E26/ND 4/1CT


Contractor-grade Plastic (Non-Dimmable) A-Shape Lamps

Photometric data

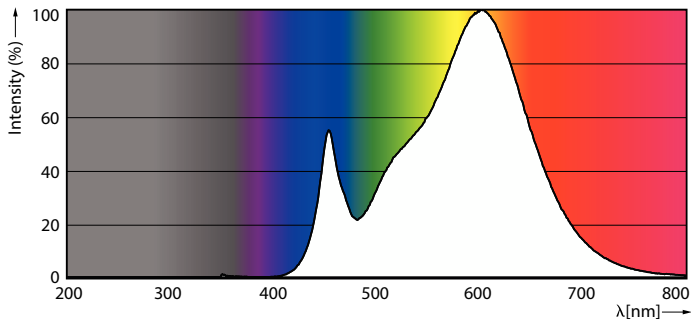


Spectral Power Distribution Colour - 9A19/CNG/830/FR/P/E26/ND 4/1CT

Lifetime

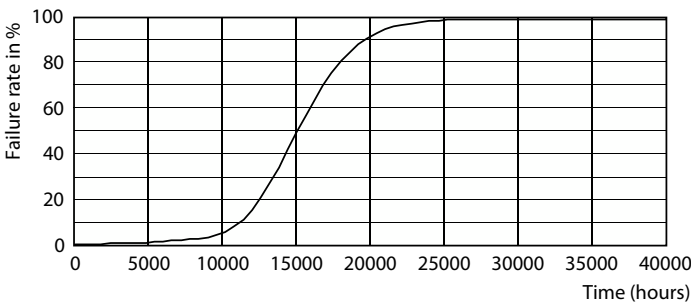

Life Expectancy Diagram

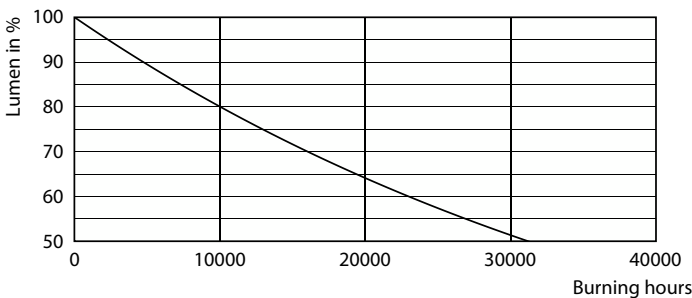

Lumen Maintenance Diagram - 9A19/CNG/830/FR/P/E26/ND 4/1CT

