

Product data sheet

Specifications



Wall mounted steel enclosure,
PanelSeT S3D, plain door, with
mounting plate, 300x300x150mm,
IP66, IK10

NSYS3D3315P

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range	PanelSeT
Product name	PanelSeT S3D
Application	Multi-purpose
Category	Compact enclosure
Enclosure nominal height	11.8 in (300 mm)
Enclosure nominal width	11.8 in (300 mm)
Enclosure nominal depth	5.9 in (150 mm)
Door type	Solid
Mounting plate description	Plain
Type of gland plate	Standard
Installation accessory type	Wall-mounting
Device composition	1 body 1 mounting plate 1 door with lock 1 cable gland plate

Complementary

body type	Single piece body Gutter-shaped front rail double sheet thickness
Number of doors	Front face 1
Door opening side	Reversible 120 °)
Lock type	3 mm double-bar lock
Accessibility for operation	Front
Removable parts	Door by hinges Cable gland plate by screws Mounting plate by fixing element
Material	Enclosure steel Mounting plate galvanised steel
Surface finish	Enclosure epoxy-polyester powder
color	Enclosure Gray RAL 7035)
Standards	IEC 62208 UL CUL

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	cUL UL BV GL DNV
Product Weight	10.67 lb(US) (4.84 kg)

Environment

NEMA Degree of Protection	NEMA 4X/13
IK degree of protection	IK10 IEC 62262
IP degree of protection	IP66 IEC 60529

Ordering and shipping details

Category	US10ES180034
Discount Schedule	0ES1
GTIN	3606480159749
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	7.874 in (20.000 cm)
Package 1 Width	12.205 in (31.000 cm)
Package 1 Length	12.598 in (32.000 cm)
Package weight(Lbs)	10.803 lb(US) (4.900 kg)
Unit Type of Package 2	P12
Number of Units in Package 2	42
Package 2 Height	42.913 in (109.000 cm)
Package 2 Width	31.496 in (80.000 cm)
Package 2 Length	47.244 in (120.000 cm)
Package 2 Weight	478.403 lb(US) (217.000 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Total lifecycle Carbon footprint	46 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	24 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	10 kg CO2 eq.
Carbon footprint of the installation phase [A5]	1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	12 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
SCIP Number	E893f0a0-d2cc-4011-9425-3873dde70142
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Cadmium and cadmium compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes
Silicon free	Yes

Use Longer


 Lifetime extension	
Repair	No

Use Again

 Repack and remanufacture	
Recyclability potential, in %	98
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

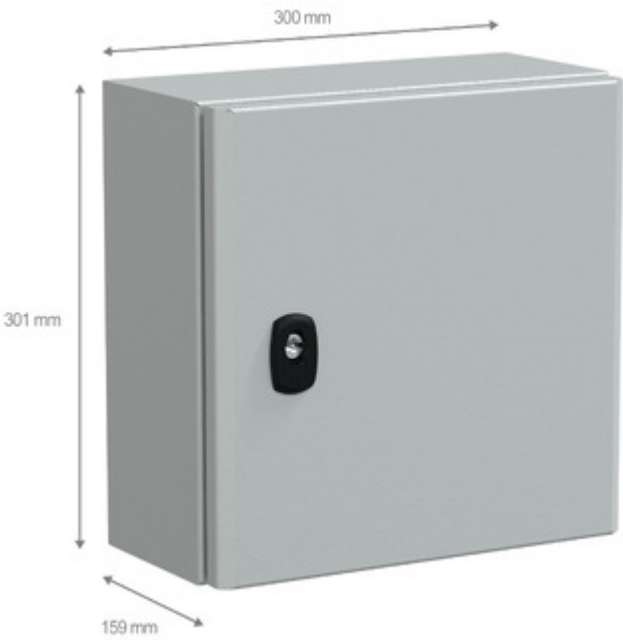

Offer Marketing Illustration

Product benefits / Features



Sturdy components' protection



Earthing studs included



Large choice of dimensions & accessories



Quality & aesthetics



Easy to equip
Easy to maintain



Reusable eco-friendly packaging



Image of product in real life situation

