


Product data sheet

Characteristics

9001SKR9RH28

30mm push button, Type SK, red
nonilluminated mushroom maintained push
pull, 6A inductive at 120VAC, 2NC/1NO, NEMA
4, 4X

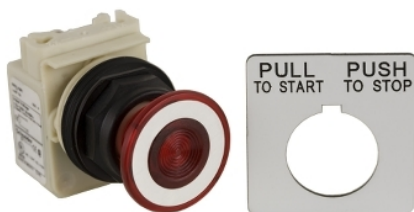

Main

Range of Product	Harmony 9001SK
Product or Component Type	Push-button
Device short name	9001SK
Operator additional information	Screw-on plastic

Complementary

Bezel material	Plastic
Mounting diameter	1.2 in (30 mm)
Contacts type and composition	1 C/O + 1 NC
Contact operation	Standard
Mechanical durability	5000000 cycles
Device presentation	Complete product
Cap/operator or lens colour	Red
Operator profile	Mushroom Ø 41 mm
Type of operator	Push-pull
Operator position information	2 positions
Size	30 mm

Environment

Standards	EN/IEC 60947-5-4 JIS C 4520 UL 508 CSA C22.2 No 14 EN/IEC 60947-1 EN/IEC 60947-5-1 JIS C 852
IP degree of protection	IP66
NEMA degree of protection	NEMA 1/2/3/3R/4/4X/6/12/13

Ordering and shipping details

Category	US10CS121429
Discount Schedule	0CS1
GTIN	785901043218
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.080 in (12.903 cm)
Package 1 Width	2.0000000000 in (5.08 cm)
Package 1 Length	12.903 in (32.774 cm)
Package 1 Weight	8.000 oz (226.796 g)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------