M-14477 | 1

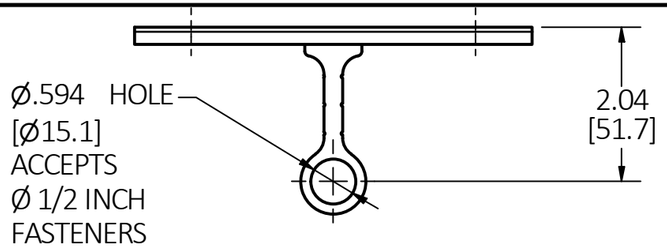

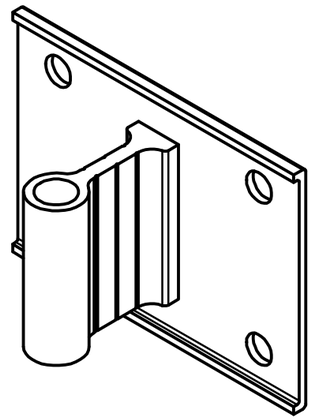

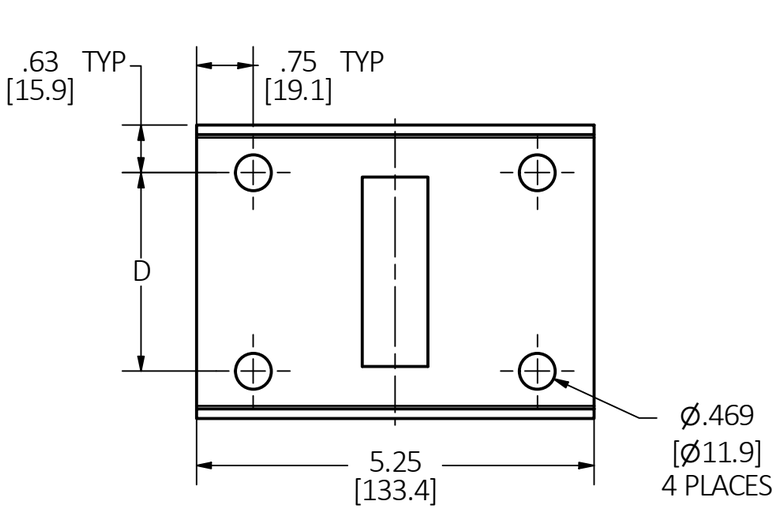

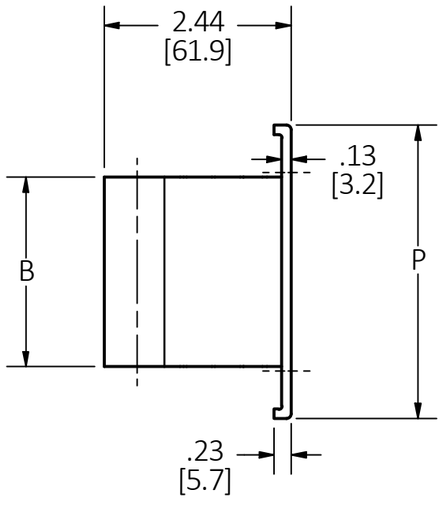

CATALOG NUMBER	TRAY SIDE RAIL HEIGHT NOMINAL (in [mm])	TRAY SIDE RAIL HEIGHT ACTUAL (in [mm])	P (in [mm])	D (in [mm])	B (in [mm])
LSG4	4 [101.6]	4.25 [108.0]	3.87 [98.3]	2.62 [66.5]	2.50 [63.5]
LSG6	6 [152.4]	6.25 [158.8]	5.87 [149.1]	4.62 [117.3]	3.50 [88.9]

NOTES:
1. ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
2. PRODUCT IS cULus CLASSIFIED.
3. SUPPLIED WITH (2) SPLICE PLATES, FASTENERS: (8) Ø3/8" X 3/4" LONG SCREWS & (8) Ø3/8" FLANGED HEX NUTS.
4. INSTALL IN ACCORDANCE WITH NEMA STANDARD VE-2 "CABLE TRAY INSTALLATION GUIDELINES".
5. THIS PART FUNCTIONS AS BOTH A STANDARD SPLICE PLATE CONNECTOR AND AS A METHOD TO SUPPORT THE CABLE TRAY SIDE RAIL WITH 1/2 INCH DIA. THREADED RODS OR OTHER FASTENERS.

CAGE CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
SPLICE PLATE	ALUMINUM	
SCREWS	STEEL	GEOMET PLATED
NUTS	STEEL	GEOMET PLATED

REV	DESCRIPTION	APP	DATE
1	RELEASED PER DCN211102014008	AD	11/2/21

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE

SUPPORT HANGAR HORIZONTAL SPLICE PLATE, LADDER TRAY

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED
.XX = ± .01
.XXX= ± .005
ANGLE TOL. ±2'

DR. BY	AD	SCALE	1 / 2
CHK. BY	SBW	DATE	10/13/21

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

B
M-14477
1